

SINGLE ROW TOP ENTRY SMT HEADER



1988 SERIES. 2.00 mm. (0.079") pitch.


General Features

- Available in 2 through 15 circuits
- Mates with 2.00 mm. pitch crimp housing 1985 series
- Tin plated square pin 0.50 mm.
- Polarised with positive lock
- Fully shrouded with soldering tabs to fix to PCB

Materials

- Insulator: Nylon 6/T UL 94 V-0
- Contact: Tin plated brass
- Operating temperature: -25°C to +85°C
- RoHS compliant

Dimension Information

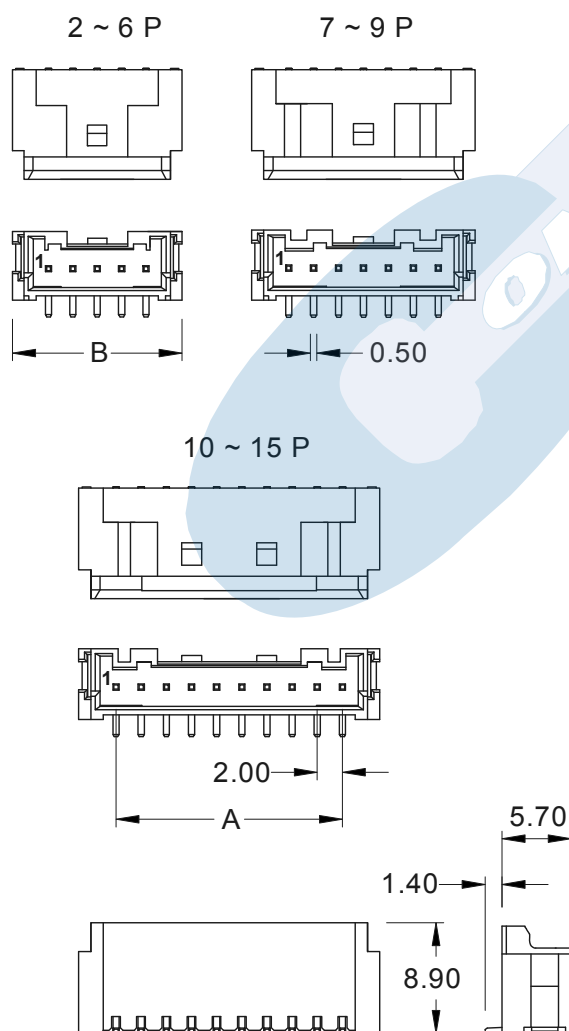

Dimensions: (In mm.)

A = 2.00 x (XX*-1)

B = 2.00 x (XX*)+4.00


* **XX** (Number of circuits)

Electrical Features

- Voltage rating: < 250V
- Current rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 800 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Pin retention force to insulator: > 1.00 Kgf
- Durability: 25 cycles



Ordering Information:

1988 - 2- XX- 2
1 3 4

1. Connector Series

3. (XX) Number of circuits

- Available in 2 through 15 circuits

