

# DUAL ROW RIGHT ANGLE PIN HEADER



## 2027 SERIES. 2.00 x 2.00 mm. (0.079 x 0.079") pitch.



### General Features

- Available in 4 through 80 circuits
- Mates with sockets 2.00 mm. pitch 2042, 2048, 2049, 2105, 2184, 2194, 2191, 2280, 2172, 2173, 2094, 2095, 2197, 2265 and 2022 series
- 0.50 mm. square pin with different plating
- Available with different pin length. Contact sales office

### Materials

- Insulator: Polyester nylon 6T UL 94 V-0
- Contact: brass
- Operating temperature: -40°C to +105°C
- RoHS compliant

### Dimension Information

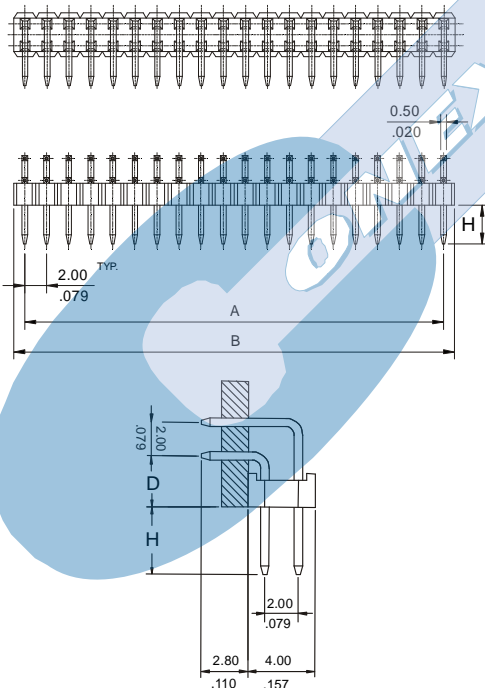

### DIMENSIONS

$$A = 2.00 \left( \frac{XX}{2} - 1 \right) \quad B = 2.00 \left( \frac{XX}{2} \right)$$


(XX) = Number of circuits

### Electrical Features

- Voltage rating: < 125V
- Current rating: < 2 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 500 V AC/minute
- Insulation resistance: >1000 MΩ
- Capacitance: < 2pF at 1 KHz.

### Mechanical Features

- Pin retention force to insulator: > 0.30 Kgf
- Durability: 50 cycles

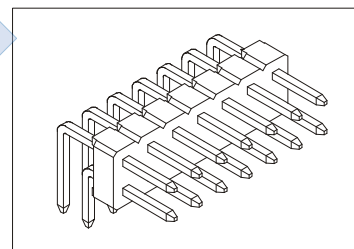

### Ordering Information:

**2027 - T- XX- C**  
1            2            3            4

#### 1. Connector Series

#### 2. (T) Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over nickel  
Recommended Finish
- T = 5. 15μ" gold over nickel
- T = 6. 30μ" gold over nickel
- T = 13. Sel. gold flash over nickel overall
- T = 15. 15μ" sel. gold over nickel overall
- T = 16. 30μ" sel. gold over nickel overall

#### 3. (XX) Number of circuits

- Available in 4 through 80 circuits

#### 4. (C) Pin Dimensions

- C = 1. Dim. H = 4.00 mm. ; D=3.15 mm.  
Recommended Option
- C = 2. Dim. H = 3.50 mm. ; D=3.15 mm.
- C = 3. Dim. H = 4.00mm. ; D=2.25 mm.
- C = 4. Dim. H = 4.00 mm. ; D=1.50 mm.
- C = 5. Dim. H = 12.00 mm. ; D=3.15 mm.