

DUALROW D/ BODY VERTICAL PIN HEADER



2028 SERIES. 2.00 mm. (0.079") pitch.





General Features

- Available in 4 through 80 circuits
- Mates with sockets 2.00 mm pitch 2042, 2048, 2049, 2105, 2184, 2194, 2191, 2280, 2172, 2173, 2094, 2095, 2197, 2265 and 2022 series
- 0.50 mm. square pin with different plating
- Available with different pin length. Contact sales office

Materials

- Insulator: Polyester nylon 6T UL 94 V-0
- Contact: brass
- Operating temperature: -40°C to +105°C
- RoHS compliant

Dimension Information

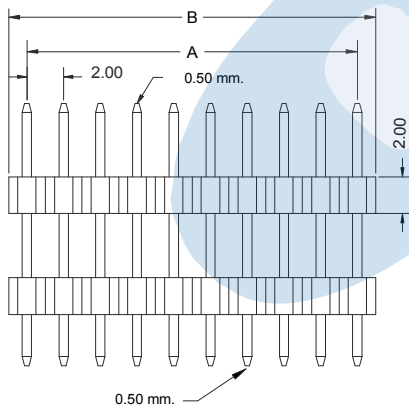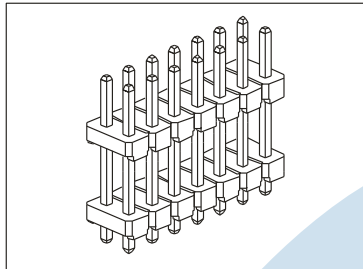

DIMENSIONS

$$A = 2.00 \left(\frac{XX}{2} - 1 \right) \quad B = 2.00 \left(\frac{XX}{2} \right)$$

(XX) = Number of circuits

Electrical Features

- Voltage rating: < 125V
- Current rating: < 2 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 500 V AC/minute
- Insulation resistance: >1000 MΩ
- Capacitance: < 2pF at 1 KHz.

Mechanical Features

- Pin retention force to insulator: > 0.30 Kgf
- Durability: 50 cycles

Ordering Information:

2028 - T- XX- C
 1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 2. Tin plated
 - T = 3. Gold flash over nickel
- Recommended Finish

- T = 5. 15μ" gold over nickel
- T = 6. 30μ" gold over nickel
- T = 13. Sel. gold flash over nickel overall
- T = 15. 15μ" sel. gold over nickel overall
- T = 16. 30μ" sel. gold over nickel overall

3. (XX) Number of circuits

- Available in 4 through 80 circuits

4. (C) Pin dimensions

- C = 1. H = 4.00 mm. D = 7.50 mm. F = 2.80 mm.
- C = 3. H = 4.00 mm. D = 12.00 mm. F = 2.80 mm.
- C = 4. H = 4.00 mm. D = 6.00 mm. F = 2.80 mm.
- C = 5. H = 2.80 mm. D = 4.00 mm. F = 2.80 mm.
- C = 6. H = 4.20 mm. D = 10.16 mm. F = 2.80 mm.
- C = 7. H = 6.90 mm. D = 8.90 mm. F = 2.80 mm.
- C = 8. H = 4.00 mm. D = 24.00 mm. F = 2.80 mm.
- C = 9. H = 8.10 mm. D = 9.30 mm. F = 2.80 mm.
- C = 10. H = 4.00 mm. D = 16.00 mm. F = 2.80 mm.
- C = 11. H = 4.25 mm. D = 19.70 mm. F = 4.30 mm.
- C = 12. H = 4.00 mm. D = 14.00 mm. F = 2.80 mm.
- C = 13. H = 6.00 mm. D = 12.00 mm. F = 3.00 mm.
- C = 14. H = 4.00 mm. D = 34.00 mm. F = 4.00 mm.
- C = 15. H = 4.50 mm. D = 6.50 mm. F = 4.50 mm.
- C = 16. H = 3.17 mm. D = 20.32 mm. F = 4.70 mm.
- C = 17. H = 8.00 mm. D = 6.00 mm. F = 2.55 mm.
- C = 18. H = 2.65 mm. D = 17.65 mm. F = 7.85 mm.
- C = 19. H = 5.00 mm. D = 37.80 mm. F = 3.00 mm.