

S/ ROW DUAL BODY VERTICAL PIN HEADER



2036 SERIES. 2.00 mm (0.079") pitch.


General Features

- Available in 2 through 40 circuits
- Mates with sockets 2.00 mm pitch 2041, 2047, 2054, 2166, 2149 and 2018 series
- 0.50 mm. square pin with different plating
- Available with different pin length. Contact sales office


Materials

- Insulator: Polyester nylon 6T UL 94 V-0
- Contact: brass
- Operating temperature: -40°C to +105°C
- RoHS Compliant

Dimension Information

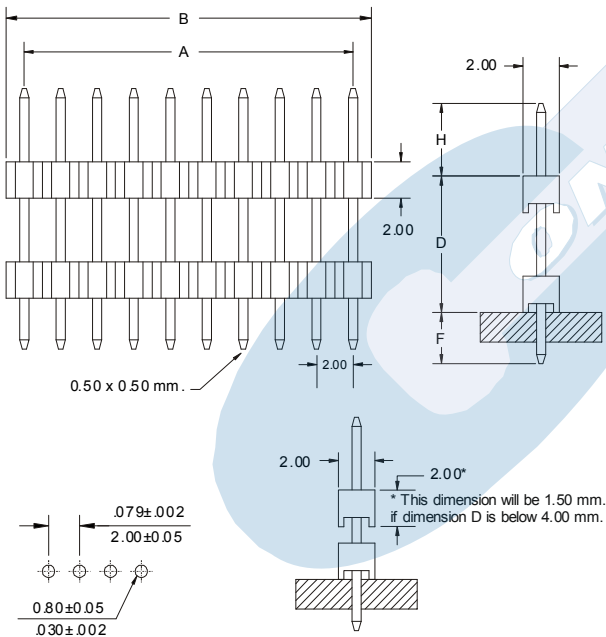

RECOMMENDED HOLE PATTERN

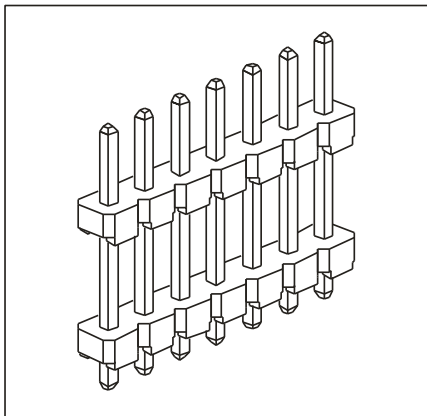

Electrical Features

- Voltage rating: < 125V
- Current rating: < 2 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 500 V AC/minute
- Insulation resistance: >1000 MΩ
- Capacitance: < 2pF at 1 KHz.

Mechanical Features

- Pin retention force to insulator: > 0.30 Kgf
- Durability: 50 cycles

Ordering Information:

2036 - **T**- **XX**- **C**
 1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 2. Tin plated
 - T = 3. Gold flash over nickel
- Recommended Finish
- T = 5. 15μ" gold over nickel
 - T = 6. 30μ" gold over nickel
 - T = 13. Sel. gold flash over nickel overall
 - T = 15. 15μ" sel. gold over nickel overall
 - T = 16. 30μ" sel. gold over nickel overall

3. (XX) Number of circuits

- Available in 2 through 40 circuits

4. (C) Pin dimensions

- C = 1. H = 4.00 mm. ; D = 7.50 mm. ; F = 2.80 mm.
- C = 2. H = 2.80 mm. ; D = 4.00 mm. ; F = 2.80 mm.
- C = 3. H = 4.00 mm. ; D = 14.00mm. ; F = 2.50 mm.
- C = 4. H = 4.00 mm. ; D = 6.00 mm. ; F = 2.80 mm.
- C = 5. H = 10.00 mm. ; D = 14.00 mm. ; F = 2.80 mm.
- C = 6. H = 2.00 mm. ; D = 3.45 mm. ; F = 2.00 mm.
- C = 7. H = 10.10 mm. ; D = 6.99 mm. ; F = 2.03 mm.
- C = 8. H = 1.50 mm. ; D = 8.00 mm. ; F = 1.50 mm.
- C = 9. H = 2.80 mm. ; D = 11.50 mm. ; F = 2.80 mm.
- C = 10. H = 4.00 mm. ; D = 4.00 mm. ; F = 3.00 mm.
- C = 11. H = 3.50 mm. ; D = 6.00 mm. ; F = 3.50 mm.
- C = A. H = 1.50 mm. ; D = 3.00 mm. ; F = 1.50 mm.

Dimensions: (In mm.)

A = 2.00 x (XX*-1)

B = 2.00 x (XX*)

* XX (Number of circuits)