

# WIRE TO WIRE CRIMP MALE HOUSING



## 2261 SERIES. 2.00 mm. (0.079") Pitch.


### General Features

- Available in 2 through 10 circuits
- Mates with 2,00 mm pitch 2260 series
- Low profile latch housing
- Use crimp terminal 2263

### Materials

- Insulator: Nylon 66 94 V-0, colour nature
- Operating temperature. -25°C to +85°C
- RoHS compliant

### Dimensional Information

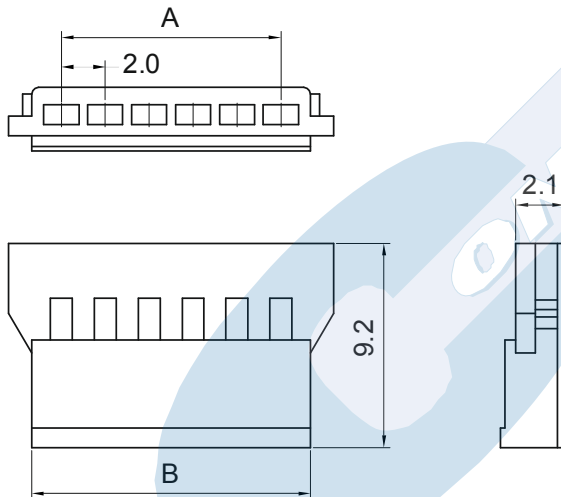


### Electrical Features

- Voltage rating : < 250 V
- Current rating: < 2 A
- Contact resistance: < 20 mΩ
- Dielectric Withstanding Voltage: 500 V AC/minute
- Insulation Resistance: >1000 MΩ

### Mechanical features

- Contact retention force to the housing: > 1.0 Kgf
- Insertion force to male: < 1.50 Kgf/pin
- Withdrawal force from male: < 0.30 Kgf/pin
- Durability: 25 cycles

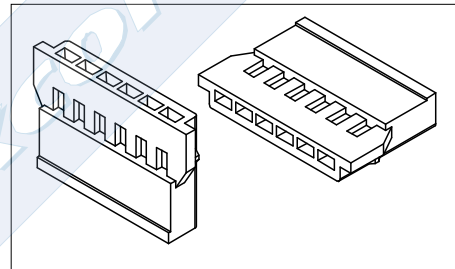

**2261 - 2- XX- 1**  
1 2 3

### 1. Connector Serie

### 3(XX) Number Of Contacts

- Available in 2 through 10 circuits

### Dimensions:

**A** = 2.00 x (XX\*-1)

**B** = 2.00 x (XX) + 0.60

\*XX (Number of circuits)

