

DIN 41612 MALE R TYPE



2317 SERIES. Male Vertical PCB Type.



General Features

- Available in 32 (A row), 32 (A+C rows), 48 (A+B+C rows), 64 (A+B rows), 64 (A+C rows) and 96 (A+B+C rows)
- Mates with female C Type 2315, female R type 2318 series and male IDC flat cable 2319 series
- Differs tail length in PCB area
- Different selective gold plating in contact and tail area

Materials

- Insulator: PBT+GF UL 94 V-0
- Contact: Phosphor bronze
- Operating temperature: -40°C to +85°C
- RoHS compliant

Dimension information

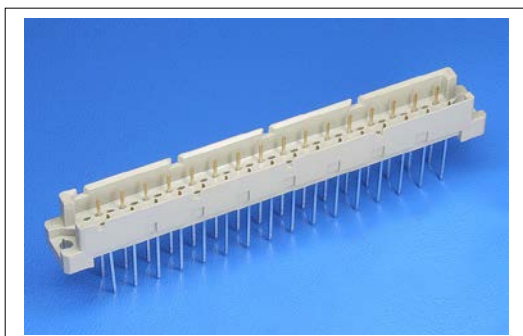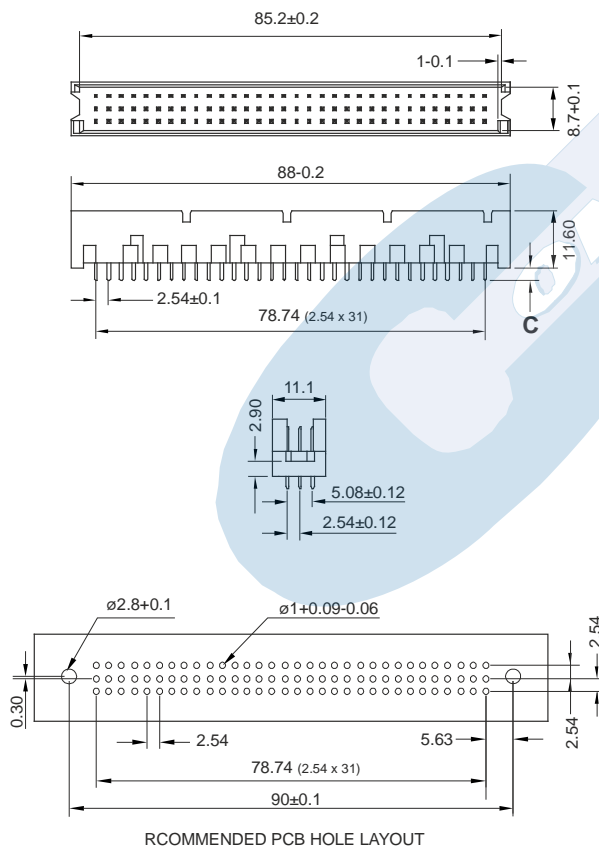

Electrical Features

- Voltage rating: < 250 V
- Current rating: < 2A 20 °C; 1A 70 °C; 0.50 A 100 °C
- Contact resistance: < 20 mΩ
- Dielectric Withstanding Voltage: 1000 V AC/minute
- Insulation Resistance: >1000 MΩ
- Capacitance: < 2 pF at 1KHz

Mechanical Features

- Insertion force receptacle / plug: < 0.09 Kgf/pin
- Unmating force receptacle / plug: : >0.015 Kgf/pin
- Durability: 50 cycles min. according gold plating thickness

Ordering Information:

2317- **T-** **XX-** **C**
 1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 2. Tin plated
- T = 3. Selective gold flash plating contact area
- T = 4. 15 μ" selec. gold plating contact area
- T = 5. 30 μ" selec. gold plating contact area
- T = 33. Sel. gold flash plating cont. and tail area
- T = 44. 15 μ" Sel. gold flash plat. cont. and tail area
- T = 55. 30 μ" sel. gold flash plat. cont. and tail area

3. (XX) Circuits Configuration

- 02. For 32 circuits (A row)
- 04. For 64 circuits (A+B rows)
- 32. For 32 circuits (A+C rows) even contacts
- 48. For 48 circuits (A+B+C rows) even contacts
- 64. For 64 circuits (A+C rows)
- 96. For 96 circuits (A+B+C rows)

4. (C) Tail Options

- 1. PCB tail 0.30x0.64 (4.00 mm.)
- 2. PCB tail 0.30x0.64 (2.50 mm.)
- 5. PCB tail 0.60x0.60 (5.00 mm.)
- 6. PCB tail 0,60x0,60 (7.40 mm.)
- 3. Wrapping 0,60x0,60 (13.00 mm.)
- 7. Wrapping 0,60x0,60 (17.00 mm.)
- 8. Wrapping 0,64x0,64 (13.00 mm.)
- 9. Wrapping 0,64x0,64 (17,00 mm.)

- **OPTIONS: 2317-0000 Transfer** (Plastic base W/O pins)
- **2317-3644** (A+C 64 Pins; extended pins a1, c1, a32)