

DIN 41612 MALE C TYPE



2326 SERIES. Male Right Angle PCB Type.


General Features

- Available in 32 (A row), 32 (A+C rows), 48 (A+B+C rows), 64 (A+B rows), 64 (A+C rows) and 96 (A+B+C rows)
- Mates with female C Type 2315, female R type 2318 series and female IDC flat cable 2319 series
- Tail length 0.48 x 0.48 in PCB area
- Optional extended(5.60 mm) or shorted(4.25 mm) pin in contact area (Consult Sales Office)
- Different selective gold plating in contact and tail area

Materials

- Insulator: PBT+GF UL 94 V-0
- Contact: Phosphor bronze
- Operating temperature: -40°C to + 85°C
- RoHS compliant

Dimension information

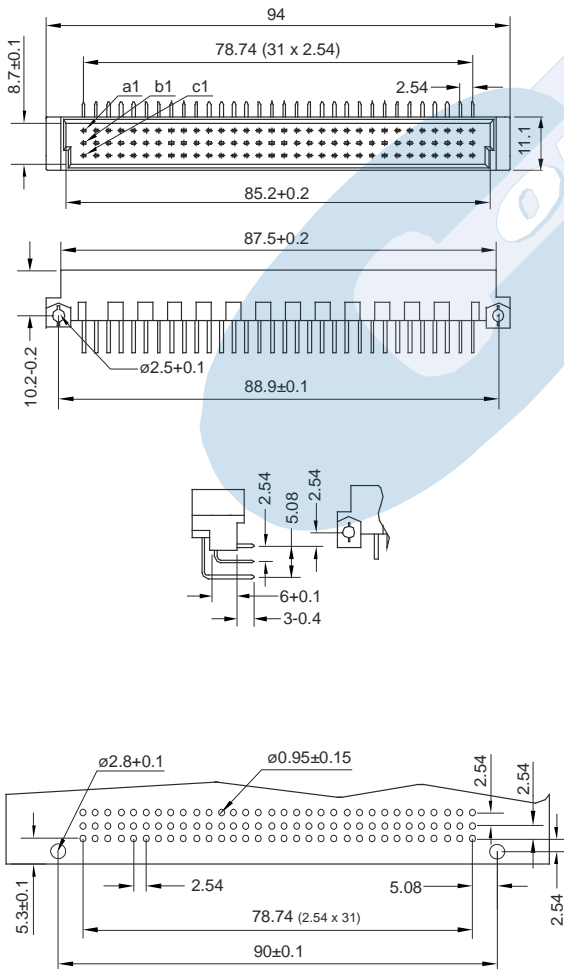

RCOMMENDED PCB HOLE LAYOUT

Electrical Features

- Voltage rating: < 250 V
- Current rating: < 2A 20 °C; 1A 70 °C; 0.50 A 100 °C
- Contact resistance: < 20 mΩ
- Dielectric Withstanding Voltage: 1000 V AC/minute
- Insulation Resistance: >1000 MΩ
- Capacitance: < 2 pF at 1KHz

Mechanical Features

- Insertion force receptacle / plug: < 0.09 Kgf/pin
- Unmating force receptacle / plug: >0.015 Kgf/pin
- Durability: 50 cycles min. according gold plating thickness

Ordering Information:

2326- **T-** **XX-** **C**
 1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 3. Selective gold flash plating contact area
- T = 4. 15 μ" selec. gold plating contact area
- T = 5. 30 μ" selec. gold plating contact area

3. (XX) Circuits Configuration

- 02. For 32 circuits (A row)
- 09. For 32 circuits (A+C rows) odd contacts
- 32. For 32 circuits (A+C rows) even contacts
- 48. For 48 circuits (A+B+C rows) even contacts
- 04. For 64 circuits (A+B rows)
- 64. For 64 circuits (A+C rows)
- 96. For 96 circuits (A+B+C rows)

4. (C) Contact Options

- 1. Standard pin length contact area 5.05 mm
- 2. Extended contacts 32a and 32c
- 3. Extended contacts 1a, 1c, 30a and 30c
- 4. Extended contacts 1a, 1c, 32a and 32c
- 5. Extended 32a, 32b and 32c contacts 1a, 1b, 1c, 2a, 2b, 2c, 31a, 31b, 31c,