

# SIM CARD SOCKET 6 AND 8 CONTACTS



## 2440 SERIES. SIM card socket. Hinge Type.


### General Features

- Available in 6 and 8 contacts
- Accept SIM card 6 and 8 contacts
- Contact area: different gold plating over 50 μ nickel
- Solder area: tin plating over 50 μ nickel
- Without card detect
- Stand-off: 0 mm.

### Materials

- Insulator: LCP UL 94 V-0
- Contact: Phosphor Bronze
- Operating temperature. -25°C to +85°C
- RoHS compliant

### Dimensional Information

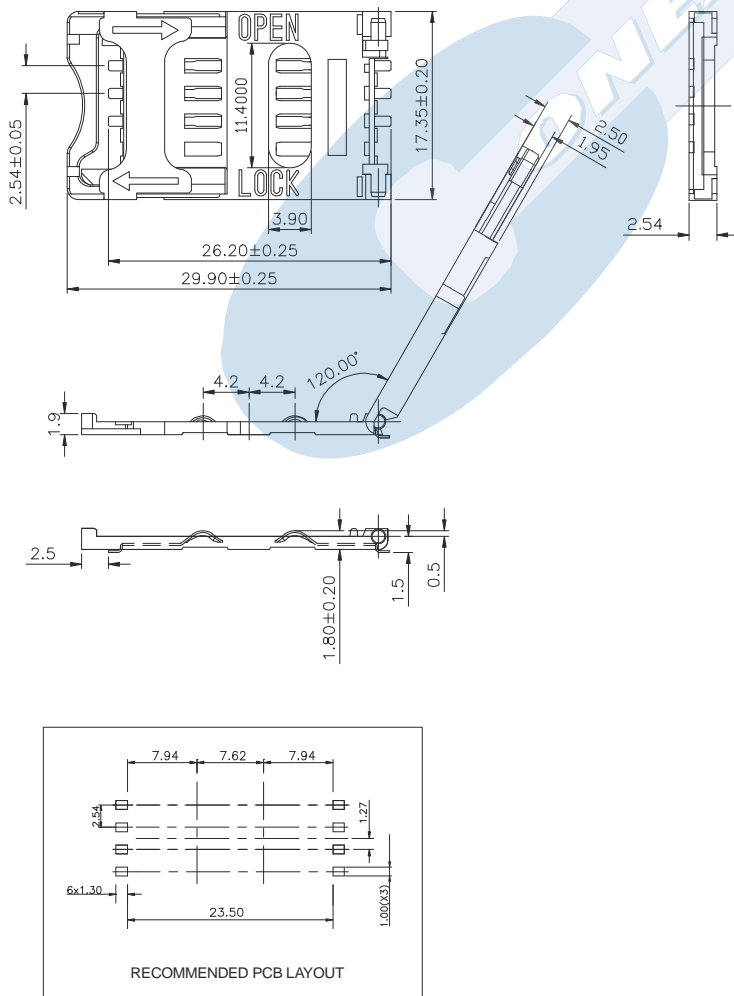


### Electrical Features

- Voltage rating: < 50 V
- Current rating: < 0.50 A
- Contact resistance: < 30 mΩ
- Dielectric withstanding voltage: 500 V AC/minute
- Insulation resistance: >1000 MΩ

### Mechanical Features

- Durability: 5.000 cycles

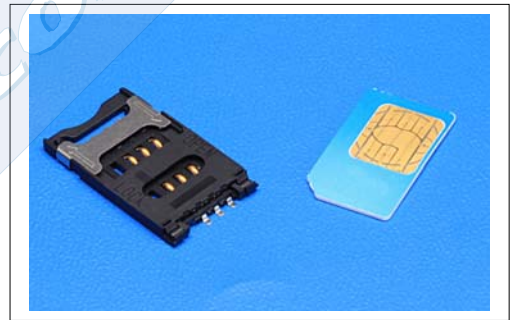

**2440 - T- XX- E**

1            2            3            4

#### 1. Series

#### 2. Plating Options

- T = 16. 30μ" selec. gold over nickel  
Recommended Finish

#### 3. Number of circuits

- Available in 6 and 8 circuits

#### 5. Packing Options

- E = 1. Tube
- E = 2. Reel