

SINGLE ROW CRIMP CONNECTOR HOUSING



2544 SERIES. 2.54 mm (0.100") pitch.

General Features

- Available in 2 through 20 circuits
- Mates with 2.54 mm pitch 2545, 2532, 2445, 2448, 2449 and 2546 headers and 0.64 mm square pin headers
- Polarised with locking ramp
- Use crimp terminal 2044

Electrical Features

- Voltage rating: < 250V
- Current rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 1000 V AC/minute
- Insulation resistance: >1000 MΩ



Materials

- Insulator: Nylon 66 UL 94 V-0
- Contact: Tin plated phosphor bronze
- Operating temperature: -25°C to +105°C
- RoHS compliant

Mechanical Features

- Contact retention force to insulator: > 1.8 Kg
- Insertion force to header: < 0.50 Kg/pin
- Withdrawal force from header: < 0.15 Kg/pin
- Durability: 25 cycles

Dimension Information

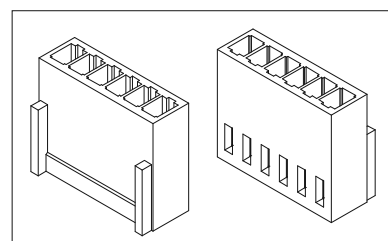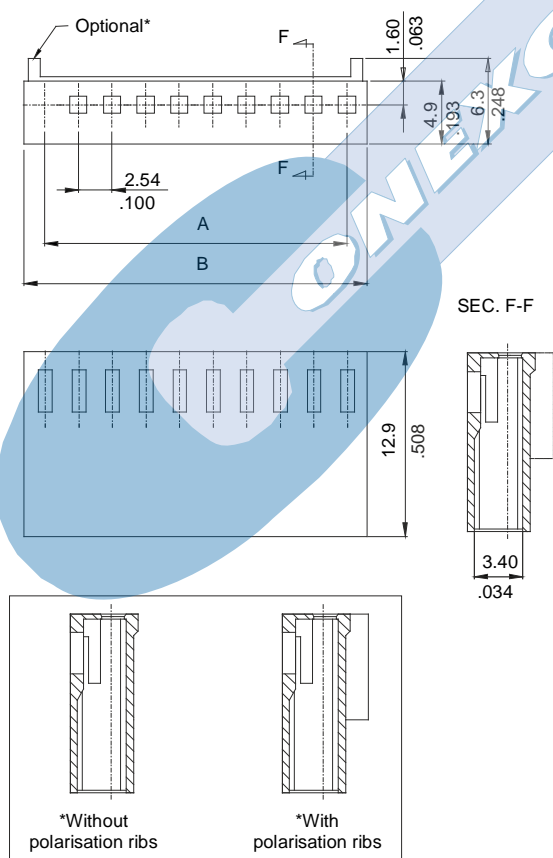

Ordering Information:

2544 - P- XX 1
1 2 3

1. Connector Series

2. (P) Polarising Options

- P = 2. With polarisation
- P = 3. Without polarisation

3. (XX) Number of circuits

- Available in 2 through 20 circuits

Dimensions: (In mm.)

A = 2.54 x (XX*-1)

B = 2.54 x (XX)+0.56

* XX (Number of circuits)