

SINGLE ROW VERTICAL PIN HEADER



2549 SERIES. 2.54 mm (0.100") pitch.


General Features

- Available in 2 through 40 circuits
- Mates with sockets 2.54 mm pitch 2101, 2550, 2595, 2596, 2553, 2554, 2247, 2551, 2552, 2577, 2102, 2106 & 2452 series
- 0,64 mm. square pin with different plating
- Different pin length. Consult Sales Office

Materials

- Insulator: High temperature thermoplastic UL 94 V-0
- Contact: brass
- Operating temperature: -40°C to +105°C
- RoHS compliant

Dimension Information

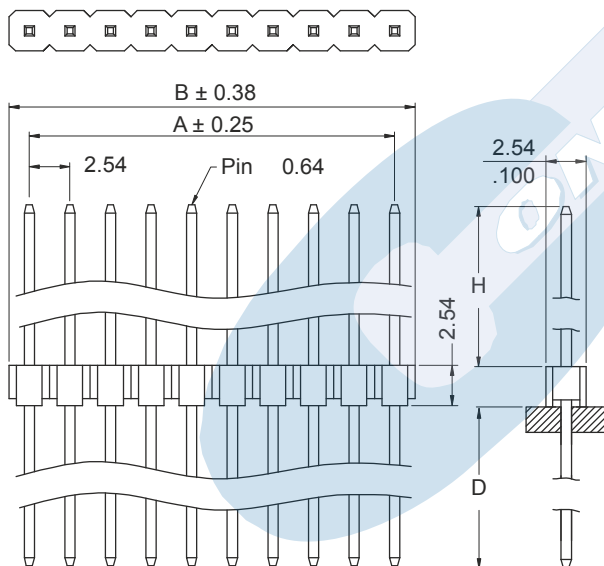

RECOMMENDED HOLE PATTERN

Dimensions: (In mm.)

A = 2.54 x (XX*-1)

B = 2.54 x (XX*)


* XX (Number of circuits)

Electrical Features

- Voltage rating: < 250V
- Current rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 600 V AC/minute
- Insulation resistance: >1000 MΩ
- Capacitance: < 2 pF at 1 KHz

Mechanical Features

- Pin retention force to insulator: > 0,50 Kgf
- Durability: 50 cycles

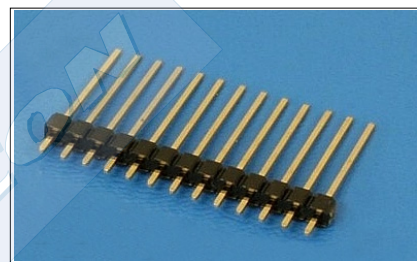

Ordering Information:

2549 - T- XX- C
 1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over nickel
Recommended Finish
- T = 5. 15μ" gold over nickel
- T = 6. 30μ" gold over nickel

3. (XX) Number of circuits

- Available in 2 through 40 circuits

5. (C) Pin Dimensions

- | | |
|------------------------|-------------|
| ● C = 1. H = 9.00 mm. | D=7.50 mm. |
| ● C = 2. H = 13.00 mm. | D=6.00 mm. |
| ● C = 3. H = 11.00 mm. | D=5.00 mm. |
| ● C = 4. H = 5.00 mm. | D=3.00 mm. |
| ● C = 5. H = 4.00 mm. | D=3.00 mm. |
| ● C = 6. H = 23.00 mm, | D=3.00 mm. |
| ● C = 7. H = 21.00 mm, | D=3.00 mm. |
| ● C = 8. H = 10.50 mm, | D=3.00 mm. |
| ● C = 9. H = 12.00 mm, | D=12.00 mm. |
| ● C = 10. H = 3.00 mm, | D=1.80 mm. |
| ● C = 11. H = 3.00 mm, | D=2.30 mm. |
| ● C = 12. H = 6.80 mm, | D=3.30 mm. |
| ● C = 13. H = 2.50 mm, | D=2.50 mm. |