

DUAL ROW RIGHT ANGLE PIN HEADER



2559 SERIES. 2.54 mm (0.100") pitch.



General Features

- Available in 4 through 80 circuits
- Mates with sockets 2.54 mm pitch 2201, 5453, 2202, 2444, 2470, 2248, 5452, 5552, 5458, 5408, 5459, 5455, 5454, 5472, 5474, 2199, 2203, 2472, 5425, 5356, 2576, 5456, 2471 series
- 0,64 mm. square pin with different plating
- Different pin length available. Consult Sales Office

Materials

- Insulator: PBT UL 94 V-0
- Contact: brass
- Operating temperature: -40°C to +105°C
- RoHS compliant

Dimensional Information

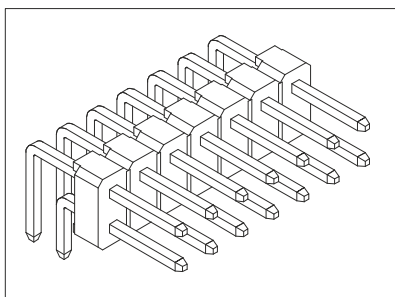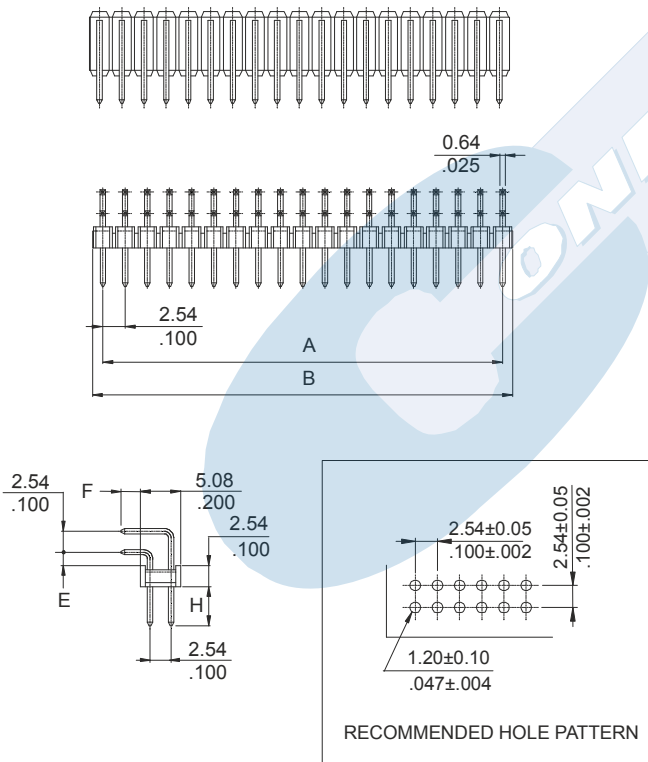

Electrical Features

- Voltage rating: < 250V
- Current rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 600 V AC/minute
- Insulation resistance: >1000 MΩ
- Capacitance: < 2 pF at 1 KHz

Mechanical Features

- Pin retention force to insulator: > 0,50 Kgf
- Durability: 50 cycles

Ordering Information:

2559 - T- XX- C
 1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over nickel
Recommended Finish
- T = 5. 15μ" gold over nickel
- T = 6. 30μ" gold over nickel
- T = 13. Sel. gold flash over nickel overall
- T = 15. 15μ" sel. gold over nickel overall
- T = 16. 30μ" sel. gold over nickel overall

3. (XX) Number of circuits

- Available in 4 through 80 circuits

5. (C) Pin Dimensions

- C = 1. H= 5.86 E= 1.50 F=3.00
- C = 2. H= 6.85 E= 1.50 F=3.00
- C = 3. H= 8.30 E= 1.50 F=3.00
- C = 5. H= 9.00 E= 1.50 F=3.00
- C = 6. H= 3.00 E= 1.50 F=3.00
- C = 7. H= 6.90 E= 3.00 F=1.50
- C = 9. H= 7.26 E= 1.50 F=3.00
- C = 10. H= 6.10 E= 1.40 F=3.30
- C = 11. H= 3.50 E= 1.50 F=3.50
- C = 12. H= 6.00 ; E= 1.20 ; F=3.00

DIMENSIONS

$$A = 2.54 \left(\frac{XX}{2} - 1 \right) \quad B = 2.54 \left(\frac{XX}{2} \right)$$

(XX) = Number of circuits