

SINGLE ROW SIDE ENTRY HEADER



2562 SERIES. 2.50 mm. (0.098") Pitch.


General Features

- Available in 2 through 20 circuits
- Mates with 2.50 mm. pitch crimp housing 2564 series
- Tin plated 0.64 mm. square pin
- Fully shrouded with polarized slot


Materials

- Insulator: Nylon 6/6 UL 94 V-0
- Terminal: Tin plated brass
- Operating temperature. -25°C to +85°C
- RoHS compliant

Dimensional Information

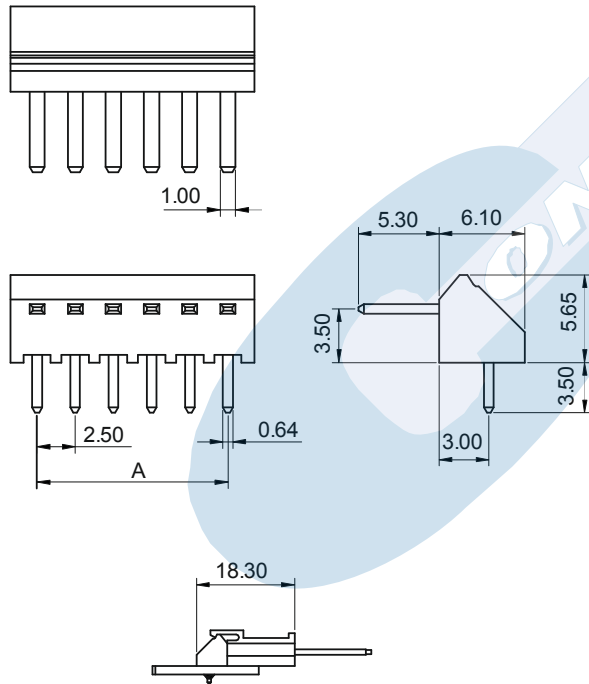

Mating Dimensions

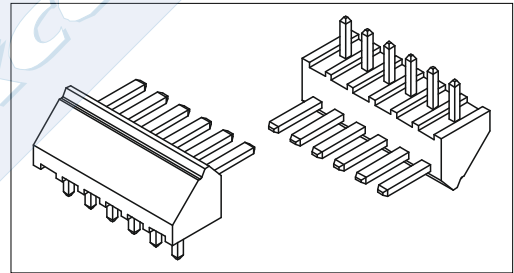


Part Number:

2562 - 2- XX- 1
1 2 3

1. Connector Serie

3. (XX) Number of circuits

- Available in 2 through 20 circuits

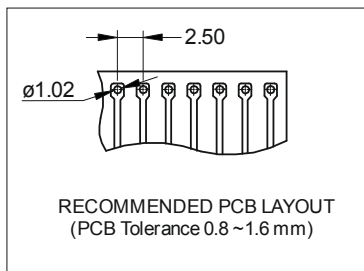

Dimensions: (in mm.)

A = 2.50 x (XX*-1)

*XX (Number of circuits)