

# SINGLE ROW RIGHT ANGLE PIN HEADER



## 2567 SERIES. 2.54 mm (0.100") pitch.


### General Features

- Available in 2 through 40 circuits
- Mates with sockets 2.54 mm pitch 2101, 2550, 2595, 2596, 2553, 2554, 2247, 2551, 2552, 2577, 2102, 2106 & 2452 series
- 0,64 mm. square pin with different plating
- Different pin length options
- Consult Sales Office


### Materials

- Insulator: High temperature thermoplastic UL 94 V-0
- Contact: brass
- Operating temperature: -40°C to +105°C
- RoHS compliant

### Dimensional Information

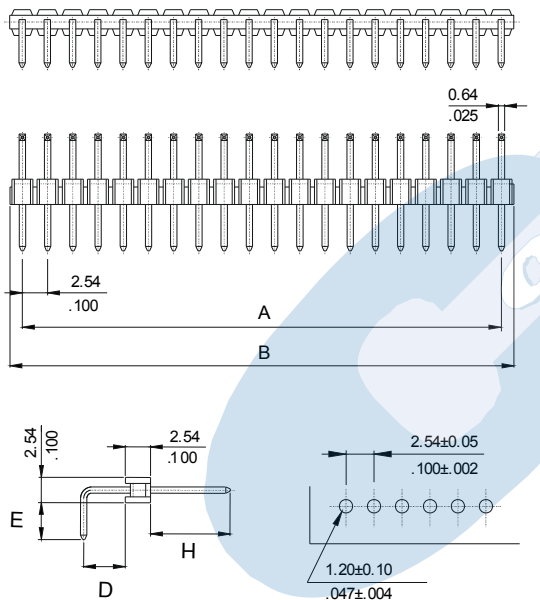

RECOMMENDED HOLE PATTERN

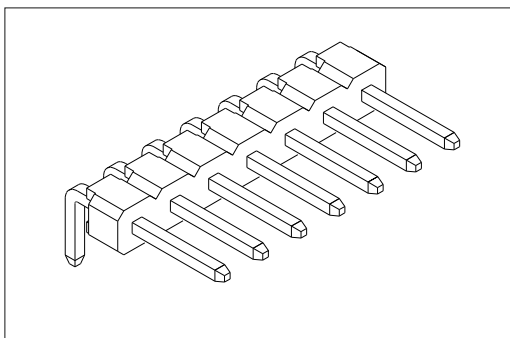

Dimensions: (In mm.)

A = 2.54 x (XX\*-1)

B = 2.54 x (XX\*)

\* XX (Number of circuits)

### Electrical Features

- Voltage rating: < 250V
- Current rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 600 V AC/minute
- Insulation resistance: >1000 MΩ
- Capacitance: < 2 pF at 1 KHz

### Mechanical Features

- Pin retention force to insulator: > 0,50 Kgf
- Durability: 50 cycles

### Ordering Information:

**2567** - **T**- **XX**- **C**  
 1                      2                      3                      4

#### 1. Connector Series

#### 2. (T) Contact Plating

- T = 2. Tin plated
  - T = 3. Gold flash over nickel
- Recommended Finish
- T = 5. 15μ" gold over nickel
  - T = 6. 30μ" gold over nickel

#### 3. (XX) Number of circuits

- Available in 2 through 40 circuits

#### 5. (C) Pin Dimensions

- C = 0. H = 2.80 mm; D = 1.50 mm; E = 3.00 mm
- C = 2. H = 6.85 mm; D = 1.50 mm; E = 3.00 mm
- C = 3. H = 7.26 mm; D = 1.50 mm; E = 3.00 mm
- C = 4. H = 8.00 mm; D = 1.50 mm; E = 3.00 mm
- C = 5. H = 3.30 mm; D = 3.30 mm; E = 3.00 mm
- C = 6. H = 6.26 mm; D = 1.50 mm; E = 3.00 mm
- C = 7. H = 8.86 mm; D = 1.50 mm; E = 3.00 mm
- C = 8. H = 5.86 mm; D = 1.50 mm; E = 3.00 mm
- C = 9. H = 6.00 mm; D = 1.50 mm; E = 3.00 mm
- C = 10. H = 15.00 mm; D = 1.50 mm; E = 3.00 mm
- C = 15. H = 9.00 mm; D = 3.00 mm; E = 3.00 mm
- C = 16. H = 25.00 mm; D = 3.00 mm; E = 3.00 mm
- C = 17. H = 6.00 mm; D = 2.00 mm; E = 3.00 mm
- C = 18. H = 8.00 mm; D = 3.20 mm; E = 3.00 mm
- C = 19. H = 3.40 mm; D = 1.50 mm; E = 3.00 mm
- C = 20. H = 10.65 mm; D = 1.50 mm; E = 3.00 mm
- C = 21. H = 13.00 mm; D = 1.82 mm; E = 3.00 mm
- C = 22. H = 6.00 mm; D = 0.50 mm; E = 4.00 mm