

# SINGLE ROW CRIMP CON. MALE HOUSING



## 2624 SERIES. 2.50 mm. (0.098") Pitch.


### General Features

- Available in 2 through 20 circuits
- Mates with 2.50 mm pitch crimp housing 2520 series
- Polarised with friction lock
- Use crimp terminal 2625

### Materials

- Insulator: PA 66 UL 94 V-0
- Operating temperature. -40°C to + 85°C
- RoHS compliant

### Dimensional Information

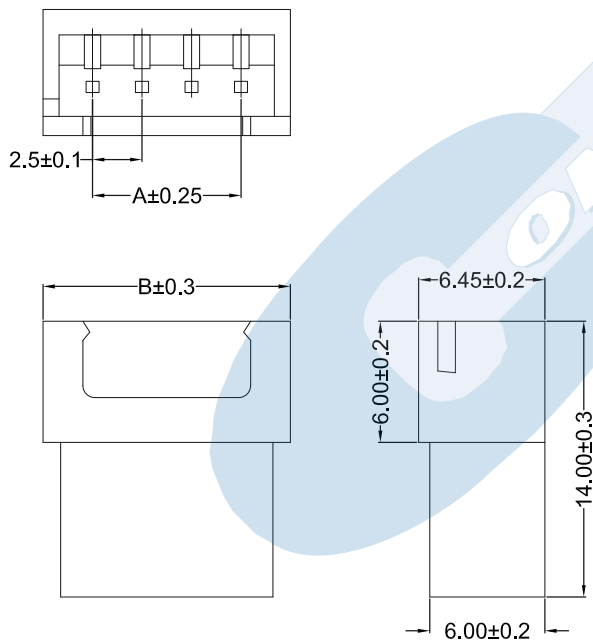

### Electrical Features

- Voltage Rating: < 250 V
- Current Rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 1000 V AC/minute
- Insulation resistance: >1000 MΩ

### Mechanical Features

- Contact retention force to the housing: > 2.0 Kgf
- Durability: 25 cycles

**2624 - 2- XX- 1**  
1            2            3

1. Connector Serie

3. (XX) Number of circuits

- Available in 2 through 20 circuits

Dimensions: (in mm.)

A = 2.50 x (XX\*-1)

B = 2.50 x (XX\*)+5.00

\*XX (Number of circuits)