

CRIMP TERMINAL



2625 SERIES. 2.50 mm. (0.098") Pitch housing.

General Features

- Accommodates wire range AWG 22 through 26
- Use in housing 2.50 mm pitch 2624 series
- Male contact with tin plated locking lance
- Maximum insulation diameter 1.90 mm (0.075")

Materials

- Contact: Tin plated phosphor bronze
- Operating temperature -40°C to +85°C


Electrical Features

- Current rating: < 3 A
- Contact resistance: < 20 mΩ

Mechanical Features

- Durability: 25 cycles
- Wire pull-out force:
 - 5.00 Kgf 22 AWG
 - 3.00 Kgf 24 AWG
 - 2.00 Kgf 26 AWG

Dimensional Information

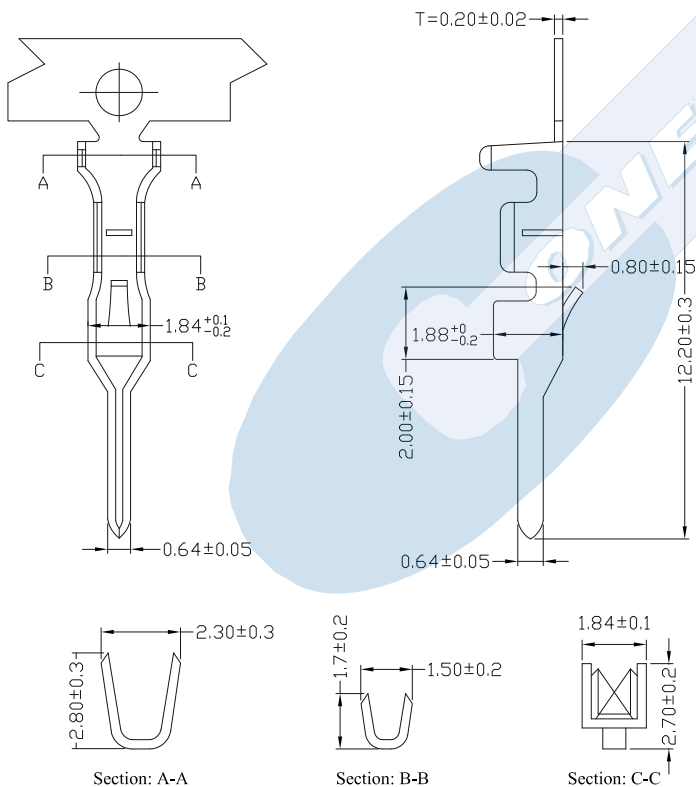

2625 - 2- 00- E

1 2

1. Terminal Serie

2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose Piece