

DUAL ROW SIDE ENTRY HEADER



2697 SERIES. 2.54 mm (0.100") pitch.



General Features

- Available in 6 through 64 circuits
- Mates with 2.54 mm crimp housing 2695 series
- Tin plated 0,64 mm. square pin
- Fully shrouded with friction lock

Materials

- Insulator: PBT UL 94 V-0
- Contact: Tin plated brass
- Operating temperature: -25°C to +85°C
- RoHS compliant

Dimension Information

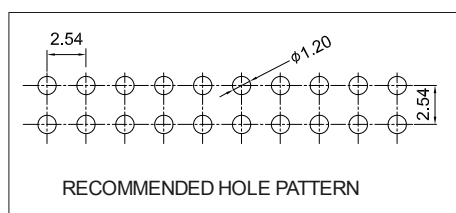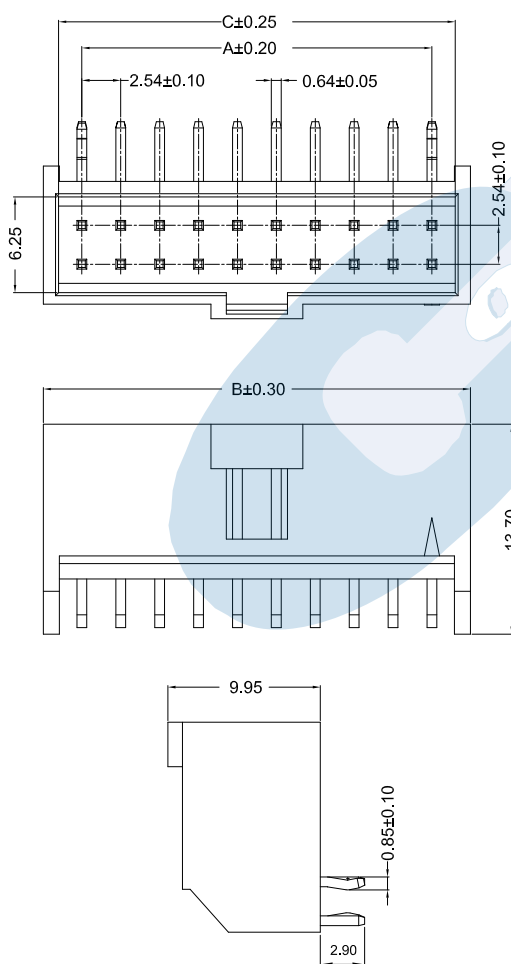


Electrical Features

- Voltage rating: < 250V
- Current rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 1000 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Pin retention force to insulator: > 1.50 Kg
- Durability: 25 cycles

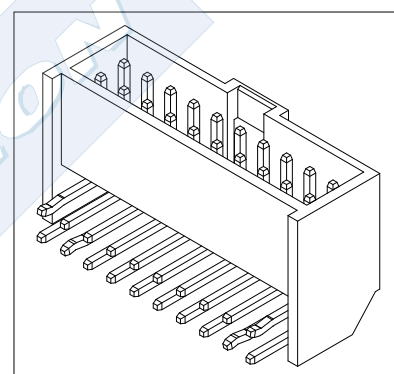

Ordering Information:

2697 - T- XX- 1
1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = **2.** Tin plated
Recommended Finish
- T = **3.** Gold flash over nickel
- T = **5.** 15µ" gold over nickel
- T = **6.** 30µ" gold over nickel

3. (XX) Number of circuits

- Available in 6 through 64 circuits

DIMENSIONS

$$A = 2.54 \left(\frac{XX}{2} - 1 \right) \quad B = 2.54 \left(\frac{XX}{2} \right) + 2.50 \quad C = 2.54 \left(\frac{XX}{2} \right) + 0.50$$

(XX) = Number of circuits