

SINGLE ROW CRIMP CONNECTOR HOUSING



3880 SERIES. 3.96 mm (0.156") pitch.


General Features

- Available in 2, 4, 6, 8, 10 and 12 circuits
- Mates with 3.96 mm pitch pin headers 3882 and 3883
- Polarised with locking ramp
- Use crimp terminal 3881 series

Materials

- Insulator: PBT UL 94 V-0
- Operating temperature: -40°C to +85°C
- RoHS compliant

Dimension Information

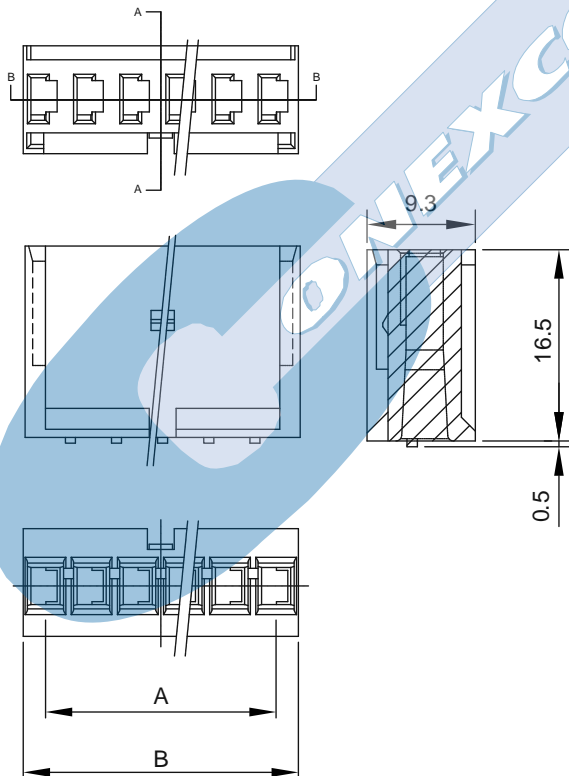


Electrical Features

- Voltage rating: < 250V
- Current rating: < 5 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 1500 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Durability: 25 cycles

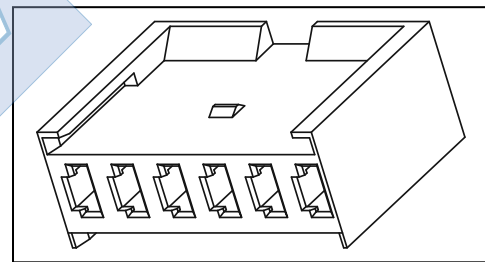

Ordering Information:

3880 - 2- XX- 1
1 2 3

1. Connector Series

3. (XX) Number of circuits

- Available in 2 through 12 circuits

Dimensions: (In mm.)

A = 3.96 x (XX*-1)

B = 3.96 x (XX)-0.14

* XX (Number of circuits)