
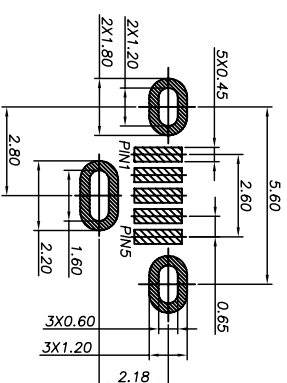
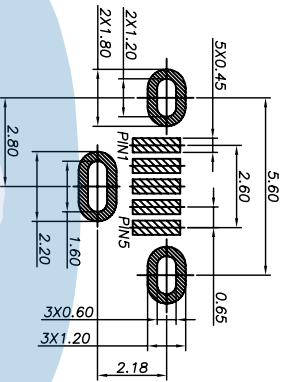


RoHS Compliant

5371 SERIES



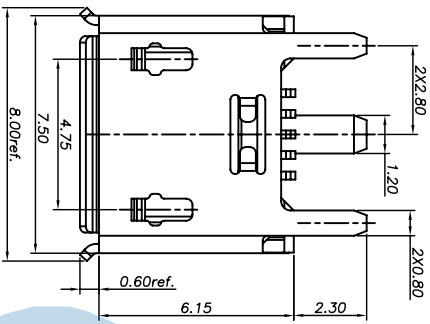


RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05


RECOMMENDED P.C.B LAYOUT(±0.05)

NOTES:

1. ELECTRONIC:
CONTACT RESISTANCE: 30mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.
2. MECHANICAL:
DURABILITY: 5000 CYCLE.
3. ENVIRONMENT CHARACTERISTICS:
OPERING TEMPERATURE:-55°C TO +105°C
4. MATERIAL LIST:

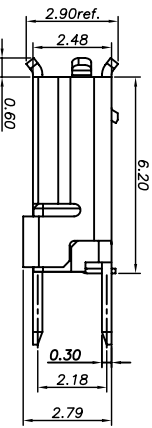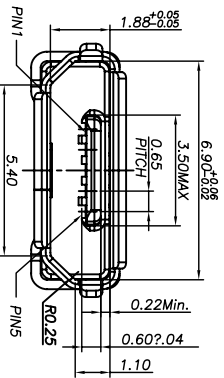

No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	STAINLESS STEEL	NI PLATED
2	CONTACT	5	COPPER ALLOY	AU/SN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLACK

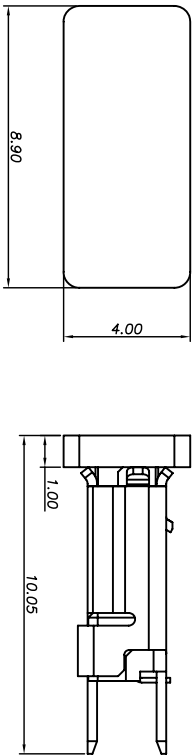

CAP DIMENSION SKETCH MAP

GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY		DATE	
ITEM	MM	INCH	Allen Yu	17/10/15	
3 PLACE	±0.15	±0.005	CHECKED BY	DATE	
2 PLACE	±0.25	±0.01	Lingli	17/10/15	
1 PLACE	±0.35	±0.015	APPROVED BY	DATE	
0 PLACE	±0.50	±0.02	Fred.Tong	17/10/15	
ANGULAR ± 3°					
METRIC	MM	U.S.	ANGLE OF PROJECTION		
			MICRO USB 2.0 FEMALE VERTICAL SMT H6.15 WITH FLANG		



P/ Number: 5371-10512

REV.	DESCRIPTION	SIGN	DATE
A	NEW	Fred.Tong	17/10/15

REV. A