

DUAL ROW IDC MALE CONNECTOR



5430 SERIES. 2.54 x 2.54 mm. (0.100 x 0.100") pitch.




General Features

- Available in 4 through 26 circuits
- Mates with 2.54 mm. PCB connectors 5431, 5432 and 5434 series
- Allows connections cable to PCB

Materials

- Insulator: glass filled polyester UL 94V-0
- Terminal: Phosphor bronze
- Operating temperature. -25°C to +85°C
- RoHS compliant

Dimension Information

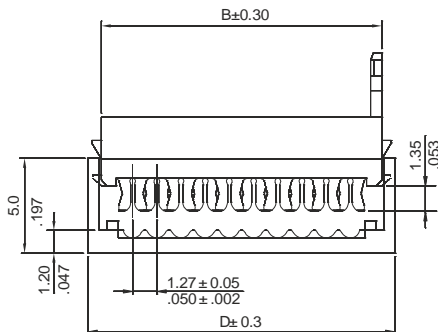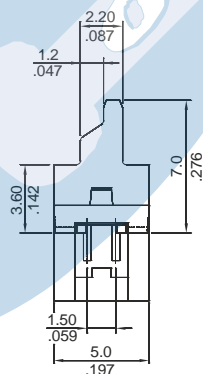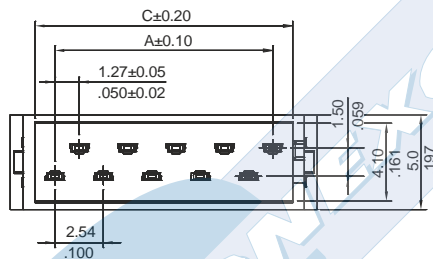


Electrical Features

- Voltage rating: < 230V
- Current rating: < 1.50 A
- Contact resistance: < 10 mΩ
- Dielectric withstanding Voltage: 500 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Cable retention force: > 1.00 Kgf per contact
- Durability: 25 Cycles

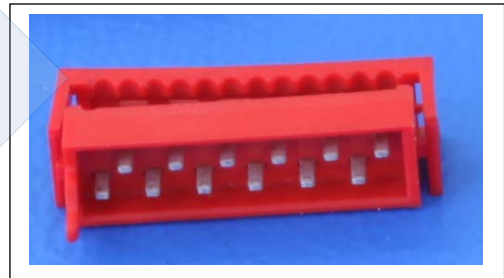

Ordering Information:

5430 - T- XX- 1
 1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 2. Tin plated

3. (XX) Number of circuits

- Available in 4 through 26 circuits

Dimensions:

$$A = 1.27 \times (XX-1)$$

$$B = 1.27 \times (XX)+2.03$$

$$C = 1.27 \times (XX)+0.83$$

$$D = 1.27 \times (XX)+3.43$$

(XX) = Number of circuits