

SIM CARD SOCKET PUSH-PUSH 6 CONTACTS



5522 SERIES. SIM card socket.



General Features

- Available in 6 contacts
- Accept SIM card 6 contacts
- Contact area: different gold plating over 50 μ nickel
- Solder area: 100 U tin plating over 50 μ nickel
- With plastic peg to fix PCB
- Stand-off: 0 mm. With card detect

Materials

- Insulator: LCP + 30% GF UL 94 V-0
- Contact: Brass
- Switch terminal: Phosphor bronze
- Shell: SUS304 t= 0,20 mm
- Operating temperature: -25°C to +85°C
- RoHS compliant

Dimensional Information

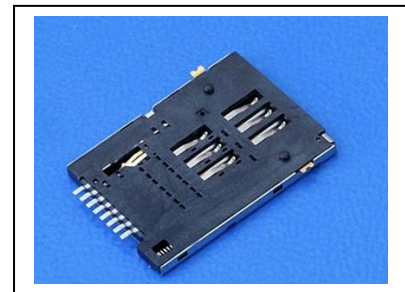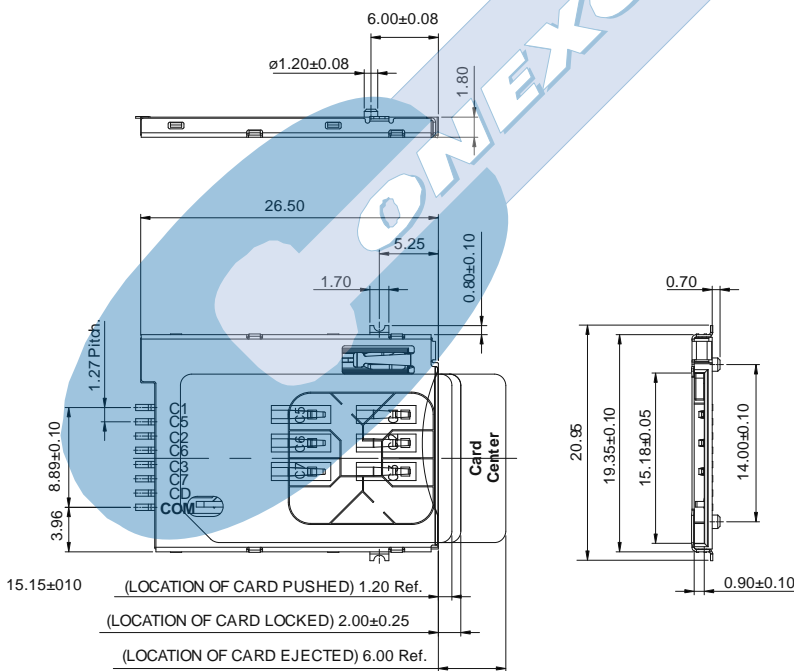

5522 - T- XX- E
 1 2 3 4

1. Series

2. Plating Options


- T = 4. 10μ" gold over nickel
Recommended Finish

3. Number of circuits

- Available in 6 circuits

5. Packing Options

- E = 2. Reel



APPLICABLE CRD SIZE

