

3.00 mm. SINGLE ROW SIDE ENTRY HEADER



5752 SERIES. 3.00 mm. (0.118") pitch.

General Features

- Available in 2 through 12 circuits
- Mates with 3.00 mm. crimp housing 5750 series
- Tin plated 0.64 mm. square pin
- Fully shrouded with polarized slot
- With plastic board lock

Materials

- Insulator: Nylon 6T UL 94 V-0
- Contact: Tin plated brass
- Operating temperature: -40°C to +105°C
- RoHS compliant


Dimensional Information

Electrical Features

- Voltage rating: < 250V
- Current rating: < 5 A
- Contact resistance: < 10 mΩ
- Dielectric withstanding voltage: 500 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Pin retention force to insulator: > 1,50 Kgf
- Durability: 25 cycles

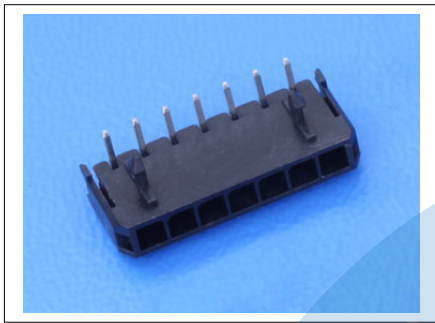

Circuits	Part Number	Dimensions		
		A	B	C
2	5752 – 2021	3.00 (.118)	9.65 (.380)	-
3	5752 – 2031	6.00 (.236)	12.65 (.498)	-
4	5752 – 2041	9.00 (.354)	15.65 (.616)	4.70 (0.185)
5	5752 – 2051	12.00 (.472)	18.65 (.734)	7.70 (0.303)
6	5752 – 2061	15.00 (.591)	21.65 (.852)	10.70 (0.421)
7	5752 – 2071	18.00 (.709)	24.65 (.970)	13.70 (0.539)
8	5752 – 2081	21.00 (.827)	27.65 (1.088)	16.70 (0.657)
9	5752 – 2091	24.00 (.945)	30.65 (1.206)	19.70 (0.776)
10	5752 – 2101	27.00 (1.063)	33.65 (1.325)	22.70 (0.894)
11	5752 – 2111	30.00 (1.181)	36.65 (1.442)	25.70 (1.012)
12	5752 – 2121	33.00 (1.299)	39.65 (1.561)	28.70 (1.130)

