CRIMP MALE TERMINAL



6201 SERIES. 6.20 mm. (0.244 ") Pitch housing

General Features

- Accommodates wire range AWG 14 through 20
- Use in housing 6.20 mm pitch 6200 series
- Male contact tin plated with locking lance
- Maximum insulation diameter 4.10 mm (0.161")

Materials

- Contact: Tin pre plated Brass
- Operating temperature -40°C to +105°C

Dimensional Information

Electrical Features


- Current rating: < 20 A
- Contact resistance: < 7 mΩ


Mechanical Features

- Durability: 25 cycles
- 12.00 Kgf 14 AWG Wire pull-out force: 11.00 Kgf 16 AWG

9.00 Kgf 18 AWG

7.00 Kgf 20 AWG

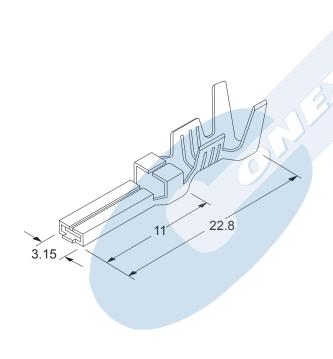



<u>6201</u> -<u>T</u>- <u>00</u>-

- 1. Terminal Serie
- 2. (T) Contact Plating
- T = 2. Tin plated
- 2. (E) Packing Options
- E = **0**. Chain
- E = 1. Loose Piece

D-XX FULL LINE CATALOGUE