

MINI DIN FEMALE CRIMP TERMINAL



7524 SERIES. Female Crimp Terminal.

General Features

- Accommodates wire range AWG 24 through 28
- Use in Mini Din Connector series 7005
- Dual Beam contact
- Maximum insulation diameter 1.30 mm (0.051")

Materials

- Contact: Phosphor bronze
- Operating temperature -40°C to +85°C
- RoHS compliant


Dimensional Information

Electrical Features

- Current rating: < 1 A
- Contact resistance: < 30 mΩ

Mechanical Features

- Durability: 100 cycles
- Wire pull-out force:
 - 4.00 Kgf 22 AWG
 - 3.00 Kgf 24 AWG
 - 2.00 Kgf 26 AWG
 - 1.00 Kgf 28 AWG

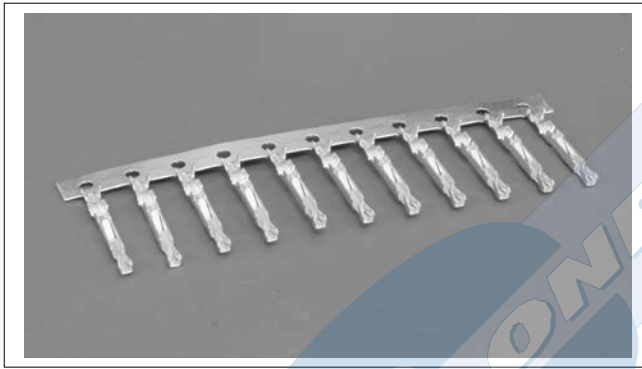

7524 - T- 00- E

1

2

1. Terminal Serie

2. (T) Contact Plating

- T = 2. Tin plated

2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose Piece

