

SIDE ENTRY SMT JACK FCC-68



7570 SERIES. Right angle PCB jack.


General Features

- Available in 4/4, 6/4, 6/6, 8/8 and 10/10 circuits
- Standard telephone jack FCC-68
- Low profile: 11.50 mm. height
- Accept standard plugs FCC-68 type
- Selective gold plating with different finish
- Trough hole metallic foot print

Materials

- Insulator: Thermoplastic UL 94V-0
- Contact: 0.35 x 0.45 mm. in phosphor bronze
- Operating temperature. -25°C to + 85°C
- RoHS compliant

Dimensional Information

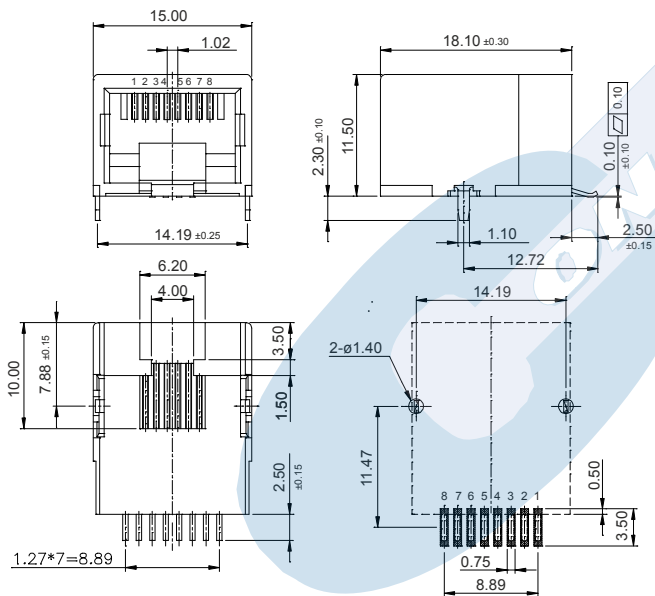

Electrical Features

- Voltage rating: < 125V
- Current rating: < 1.50 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 300 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Durability: 1000 cycles

Circuit Size	Part Number		Dimensions	
	Loose Piece	In reel	A	B
4/4	7570-T441	7570-T4412	11.21	10.40
6/4	7570-T641	7570-T6412	13.00	12.19
6/6	7570-T661	7570-T6612	13.00	12.19
8/8	7570-T881	7570-T8812	15.00	14.19
10/10	7570-T101	7570-T1012	15.00	14.19

T = Contact Plating

- T = 4. 6μ" gold over 50μ" nickel
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel
- T = 7. 50μ" gold over 50μ" nickel

Reel Dimensions:

