

TOP ENTRY SHIELDED PCB JACK FCC-68



7638 SERIES. Vertical PCB jack.





General Features

- Available in 6/6 and 8/8 circuits
- Standard telephone jack FCC-68
- 16.75 mm. height
- Accept standard plugs FCC-68 type
- Selective gold plating with different finish
- Bifurcated plastic foot print. Available Cat. 5
- With / Without panel stop
- Optional Press fit Type (Consult Sales Office)

Materials

- Insulator: Thermoplastic UL 94V-0
- Contact: 0.35 mm thickness phosphor bronze
- Operating temperature. -25°C to + 85°C
- RoHS compliant

Dimensional Information

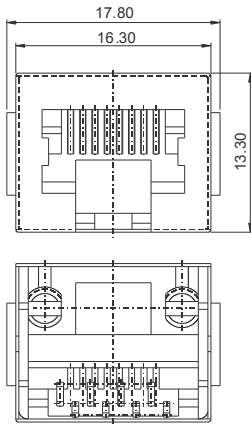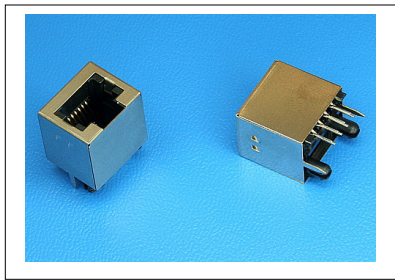

Version	Part Number		Dimensions
	With Panel Stop	W/O panel Stop	A
6/6	7638 – T661	7638 – T662	6.35 (0.250)
8/8	7638 – T881	7638 – T882	8.89 (0.350)
CAT. 5			
8/8	7638 – T885	7638 – T886	8.89 (0.350)
Optional: Press fit Type 8/8 (add P in the end of part number)			

T = Contact Plating

- T = 4. 6μ" gold over 50μ" nickel
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel
- T = 7. 50μ" gold over 50μ" nickel

RECOMMENDED HOLE PATTERN

