

SIDE ENTRY SHIELDED PCB JACK FCC-68



7680 SERIES. With leds and LAN filters.




General Features

- Available in 8/8 circuits
- Standard telephone jack FCC-68
- 13.65 mm. height
- Accept standard plugs FCC-68 type
- Selective gold plating with different finish
- With /without leds and LAN filter
- Different filter options

Materials

- Insulator: Thermoplastic UL 94V-0
- Contact: 0.35 mm thickness phosphor bronze
- Shielded: 0.25 mm thickness brass
- Operating temperature. -25°C to + 85°C
- RoHS compliant

Dimensional Information

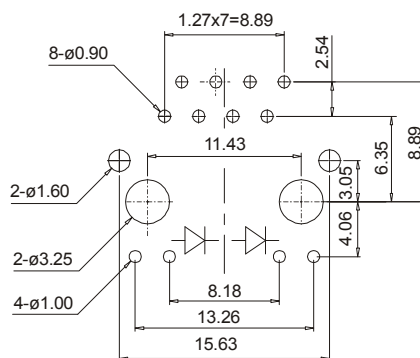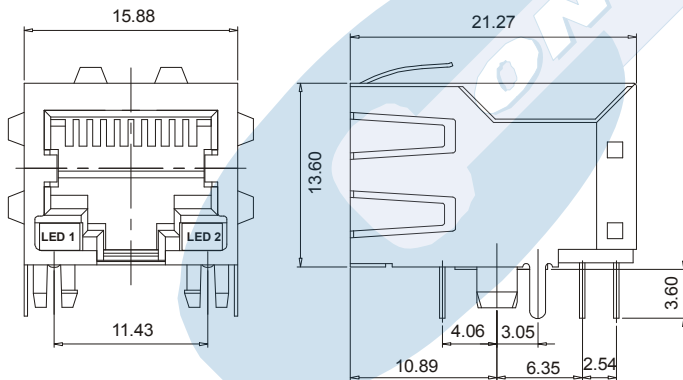

Electrical Features

- Voltage rating: < 125V
- Current rating: < 1.50 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 300 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features


- Durability: 1000 cycles

Part Number	LED 1	LED 2
7680 - T880F*	W/O LED	W/O LED
7680 - T881F*	YELLOW	GREEN
7680 - T882F*	GREEN	YELLOW
7680 - T883F*	GREEN	GREEN
7680 - T884F*	YELLOW	YELLOW

Replace the F by the number of the Filter wanted

T = Contact Plating

- T = 4. 6μ" gold over 50μ" nickel
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel
- T = 7. 50μ" gold over 50μ" nickel




SIDE ENTRY SHIELDED PCB JACK FCC-68



7680 SERIES. With leds and LAN filters.

Filter Details

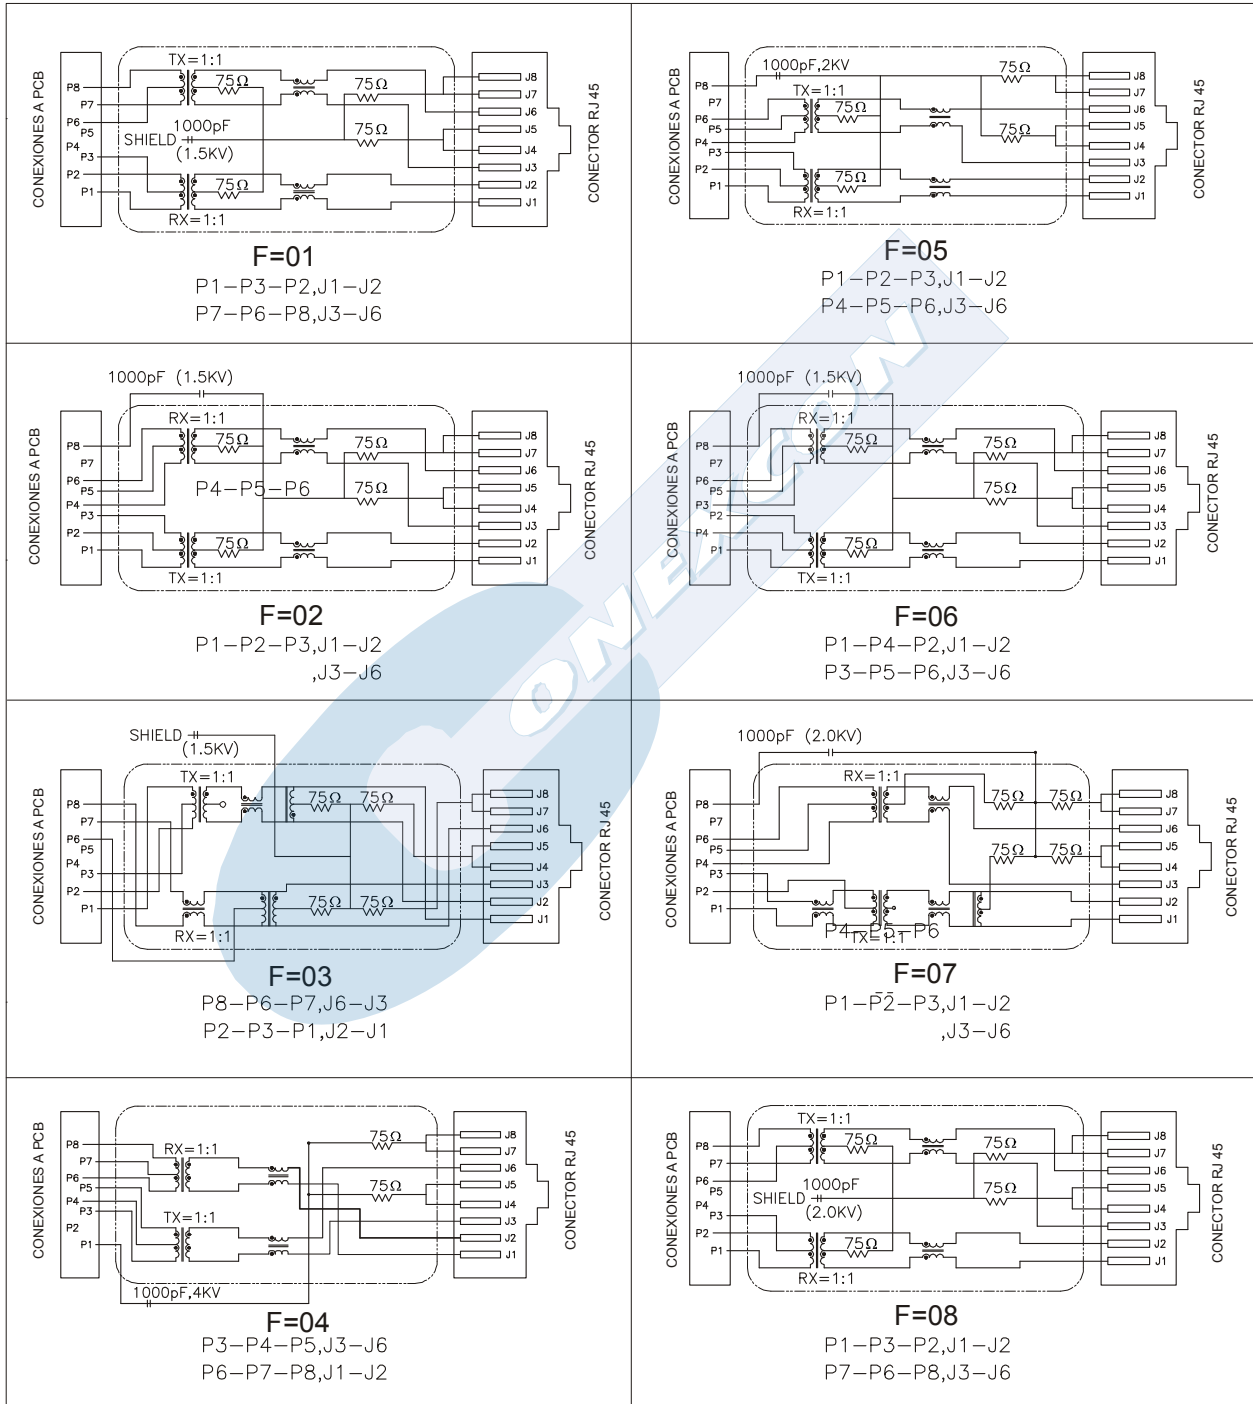

SIDE ENTRY SHIELDED PCB JACK FCC-68



7680 SERIES. With leds and LAN filters.

Details of the circuits

