

D-SUB DUST COVER




8028 SERIES. For D-Sub and D-Sub high density.

General Features

- Available in D-Sub 9(15), 15(26) and 25(44) circuits D-Sub and D-Sub high density
- Use in D-Sub Connectors
- It protect the connector again dust and shock


Materials

- Insulator:PE, UL94V-2 rated
- Operating temperature. -25°C to +85°C
- RoHS compliant

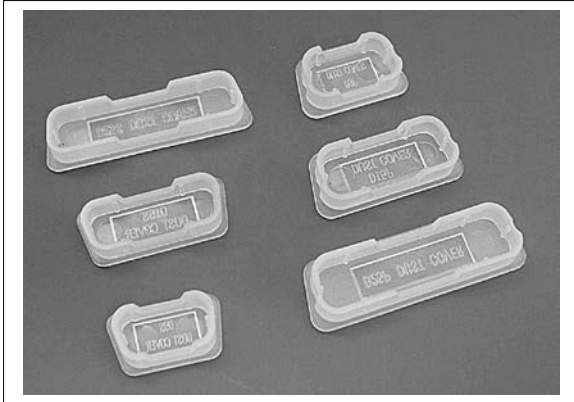


Part Number	Connector applications
8028-2091	Male 9 circuits D-Sub and Male 15 circuits D-Sub H/D
8028-2092	Female 9 circuits D-Sub and Female 15 circuits D-Sub H/D
8028-2151	Male 15 circuits D-Sub and Male 26 circuits D-Sub H/D
8028-2152	Female 15 circuits D-Sub and Female 26 circuits D-Sub H/D
8028-2251	Male 25 circuits D-Sub and Male 44 circuits D-Sub H/D
8028-2252	Female 25 circuits D-Sub and Female 44 circuits D-Sub H/D

For Male connector

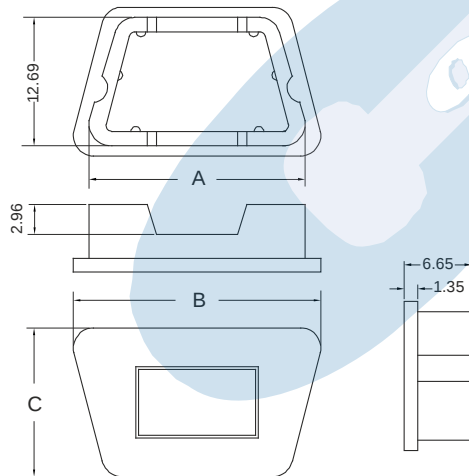

Circuits	Dimensions		
	A	B	C
9(15)	21.40	24.45	14.72
15(26)	30.10	32.80	14.72
25(44)	43.40	46.20	14.72

For Female connector

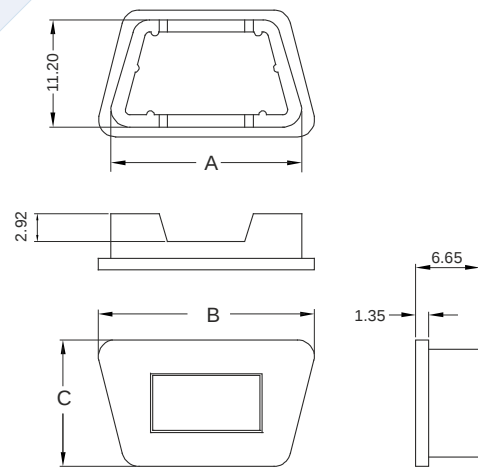

Circuits	Dimensions		
	A	B	C
9(15)	19.88	22.53	13.21
15(26)	28.27	31.00	13.21
25(44)	41.70	44.50	13.21