

SLIM D-SUB R/ANGLE PCB SMT SOCKET CON.



8079 SERIES. D Sub high density PCB socket connector. SLIM


General Features

- Available in 15 ways
- Contact area: selective gold plating over nickel
- Solder area: tin plating over nickel
- Different hardware options. Contact sales office

Materials

- Insulator: Glass-Filled Thermoplastic PBT, UL94V-0 rated
- Contact: Phosphor bronze
- Shell : Steel, 100U Tin Over 50U Min Copper
- Clinch Nut : Brass, Nickel Plated
- Screwlock : Brass, Nickel Plated
- Boardlock : Brass, Tin Plated
- Operating temperature. -25°C to +85°C
- RoHS compliant

Dimensional Information

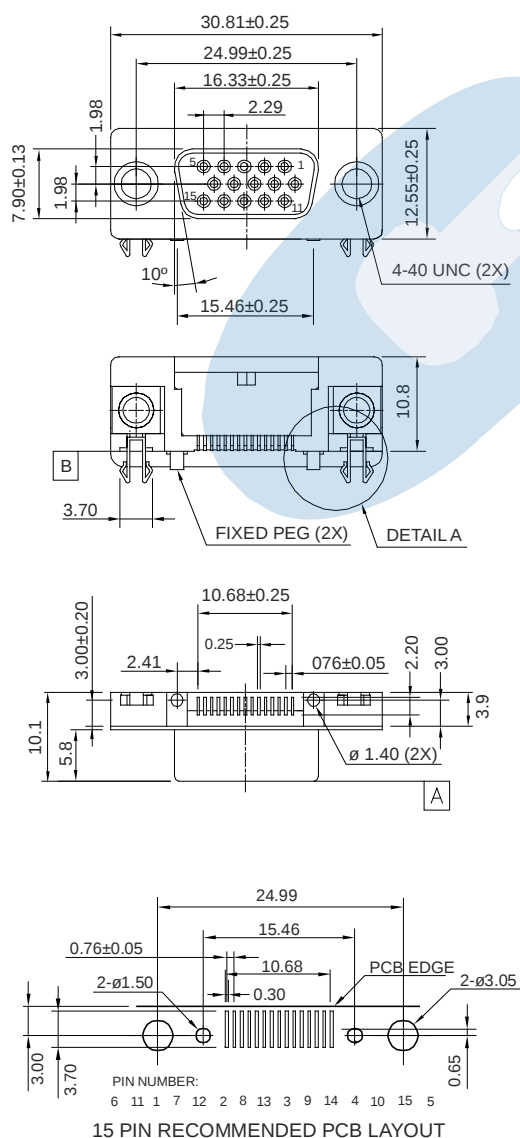

Electrical Features

- Voltage rating: < 250 V
- Current rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding Voltage: 500 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Insertion force per contact: < 0.30 Kg
- Withdrawal force per contact: < 0.015 Kg
- Durability: 500 Cycles



Ordering Information:

8079 - T- 15- C
1 2 3

1. Connector Series


2. (T) Contact Plating

- T = 3. Gold flash over 1.27 μ Ni.
- T = 4. 0.25 μ Gold over 1.27 μ Ni.
- T = 5. 0.50 μ Gold over 1.27 μ Ni.
- T = 6. 0.75 μ Gold over 1.27 μ Ni.


3. (C) Connector options

- C = 0. With circular board lock and without clinch nut 4-40 UNC mounted
- C = 1. with circular board lock and Inserted 4.40 UNC hexagonal nut
- C = 2. Standard board lock without nut 4-40 UNC hexagonal nut
- C = 3. Standard board lock with nut 4-40 UNC hexagonal nut

Fixing system options



Standard Board lock



Circular Board lock