

D SUB R/ ANGLE PCB SOCKET CONNECTOR



8098 SERIES. SLIM. 1.20 mm. Foot print



General Features

- Available in 9 and 25 ways
- Contact area: selective gold plating over nickel
- Solder area: tin plating over nickel
- Different hardware options. Contact sales office

Materials

- Insulator: Glass-Filled Thermoplastic PBT, UL94V-0 rated
- Contact: Cooper alloy
- Shell : Steel, 100U Tin Over 50U Min Copper
- Clinch Nut : Brass, Nickel Plated
- Screwlock : Brass, Nickel Plated
- Boardlock : Brass, Tin Plated
- Operating temperature. -25°C to +85°C
- RoHS compliant

Dimensions

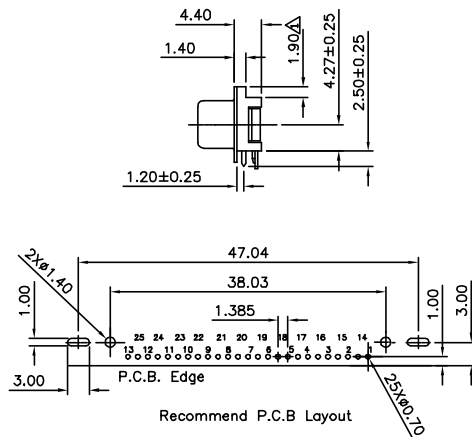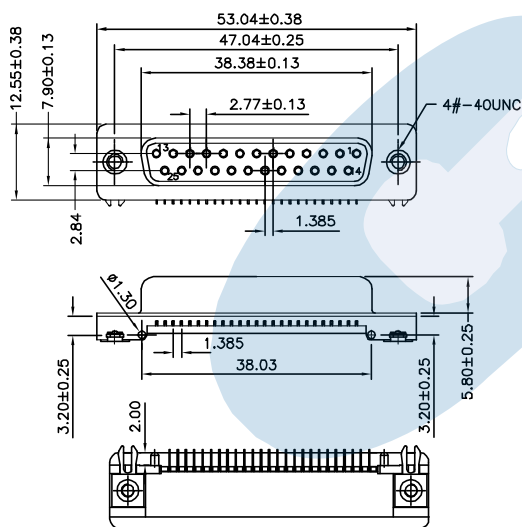

Electrical Features

- Voltage rating: < 250 V
- Current rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding Voltage: 500 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Insertion force per contact: < 0.34 Kg
- Withdrawal force per contact: > 0.030 Kg
- Durability: 500 Cycles

Circuit Size	Part Number	Dimensions			
		A	B	C	D
9	8098-T09C	16.30 (0.642)	25.00 (0.984)	30.80 (1.212)	6.95 (0.273)
25	8098-T25C	38.30 (1.507)	47.10 (1.854)	53.10 (2.090)	6.93 (0.272)

T = Plating options

- T = 3. Gold flash over 1.27 μ Ni.
- T = 4. 0.25 μ Gold over 1.27 μ Ni.
- T = 5. 0.50 μ Gold over 1.27 μ Ni.
- T = 6. 0.75 μ Gold over 1.27 μ Ni.

C = Connector options

- C = 1. Standard version with grounding tap L2 and clinch nut 4-40 UNC mounted
- C = 0. Standard version with grounding tap L2 Inserted nut 4.40 UNC w/o hex. nut (Recommended Finish)

