

# DUAL ROW VERTICAL PIN HEADER



## 8371 SERIES. 2.00 x 2.00 mm. (0.079 x 0.079") pitch. Machined contact.



### General Features

- Available in 4 through 80 circuits
- Mates with sockets 2.00 mm. pitch 8376, 8378, 8380, 8382 and 8384 series
- 0.47 round pin in contact area with different plating

### Materials

- Insulator: PPS black + 30% GF UL 94 V-0
- Contact: Brass
- Operating temperature: -40°C to +105°C
- RoHS compliant

### Dimension Information

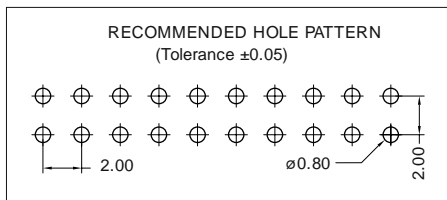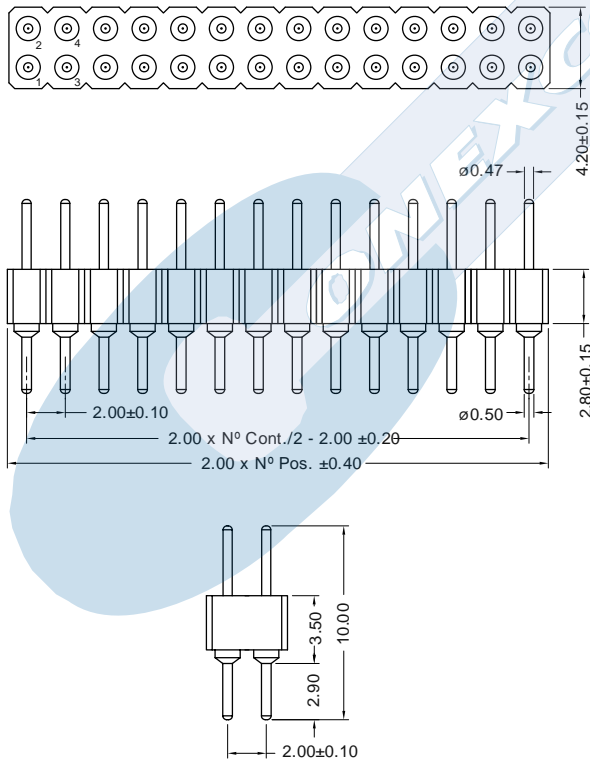


### Electrical Features

- Voltage rating: < 250V
- Current rating: < 3A
- Contact resistance: < 10 mΩ
- Dielectric withstanding Voltage: 1000 V AC/minute
- Insulation resistance: >1000 MΩ

### Mechanical Features

- Durability: 500 Cycles

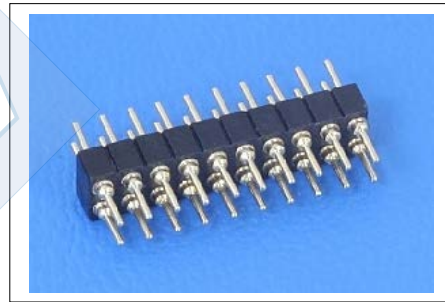

### Ordering Information:

**8371 - T- XX- 1**  
 1            2            3            4

#### 1. Connector Series

#### 2. (T) Contact Plating

- T = 3. gold flash over 30-50μ" Ni overall  
Recommended Finish
- T = 15. 15μ" selec. gold over 30-50μ" Ni overall
- T = 16. 30μ" selec. gold over 30-50μ" Ni overall

#### 3. (XX) Number of circuits

- Available in 4 through 80 circuits

### Dimensions: (In mm.)

A = 2.00 x (XX\*-1)

B = 2.00 x (XX\*)+0.40

\* XX (Number of circuits)