

SINGLE ROW VERTICAL SOCKET



8375 SERIES. 2.00 mm. (0.079") pitch. Machined contact.





General Features

- Available in 2 through 40 circuits
- Mates with pin headers 2.00mm pitch 8370, 8372, 8374, and 8385 series
- Accept round pin 0.40 to 0.66mm or square pin 0.50 mm
- Low profile 2.80 mm. high
- Machined contact with different plating

Materials

- Insulator: PPS black + 30% GF UL 94 V-0
- Contact: Clip(4 fingers): Beryllium copper
- Sleeve: Brass
- Operating temperature. -40°C to +105°C
- RoHS compliant

Dimension Information

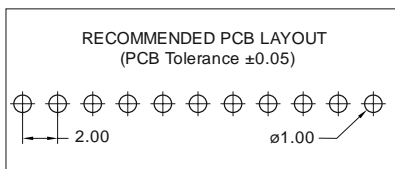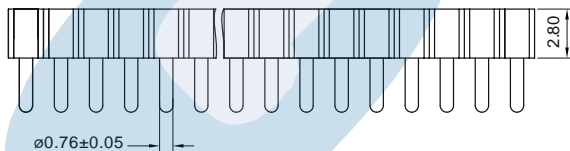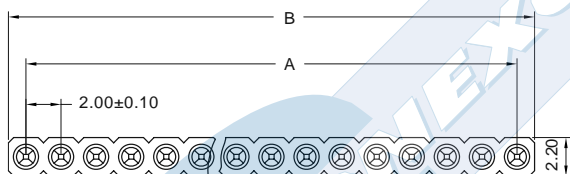

Electrical Features

- Voltage rating: < 250V
- Current rating: < 3 A
- Contact resistance: < 10 mΩ
- Dielectric withstanding Voltage: 1000 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Insertion force per pin: < 0.20 Kgf (round pin 0.46 mm)
- Withdrawal force per pin: > 0.02 Kgf (round pin 0.46 mm)
- Durability: 500 Cycles



Ordering Information:

8375 - **T**- **XX**- **1**
1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 13. Selec. gold flash over 30-50μ" Ni overall
Recommended Finish
- T = 15. 15μ" selec. gold over 30-50μ" Ni overall
- T = 16. 30μ" selec. gold over 30-50μ" Ni overall

3. (XX) Number of circuits

- Available in 2 through 40 circuits

Dimensions: (In mm.)

A = 2.00 x (XX*-1)

B = 2.00 x (XX*)

* XX (Number of circuits)