

# SINGLE ROW VERTICAL PIN HEADER



## 8392 SERIES. 2.54 mm. (0.100") pitch. Machined contact.


### General Features

- Available in 2 through 40 circuits
- 0.64 round pin in contact area
- With different plating options

### Materials

- Insulator: PPS black + 30% GF UL 94 V-0
- Contact: Brass
- Operating temperature. -40°C to +105°C
- RoHS compliant

### Dimension Information

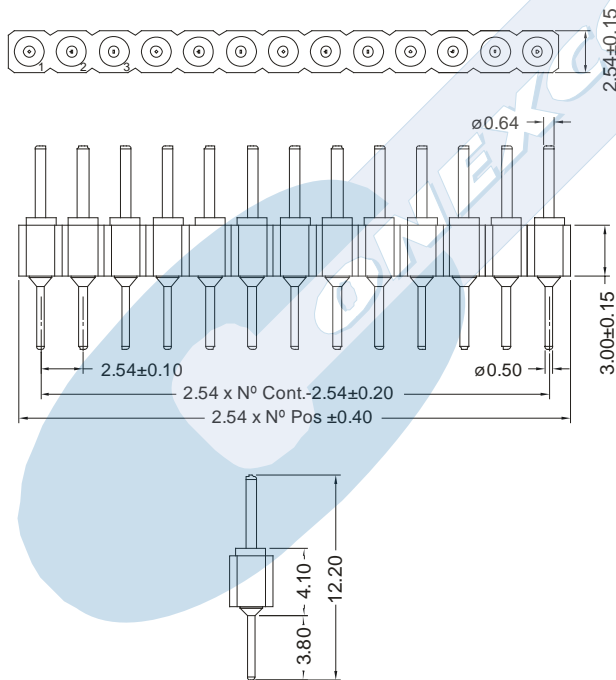

MECANIZADO RECOMENDADO  
(Tolerancia ±0.05)




### Electrical Features

- Voltage rating: < 250V
- Current rating: < 3 A
- Contact resistance: < 10 mΩ
- Dielectric withstanding Voltage: 1000 V AC/minute
- Insulation resistance: >1000 MΩ

### Mechanical Features

- Pin retention force to insulator: > 0.80 Kgf
- Durability: 500 Cycles

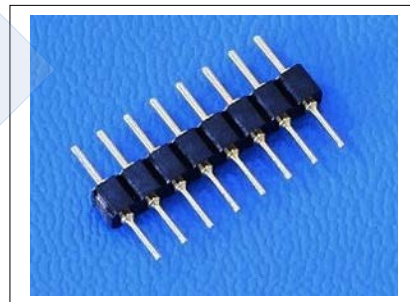

### Ordering Information:

**8392 - T- XX- 1**  
1 2 3 4

#### 1. Connector Series

#### 2. (T) Contact Plating

- T = 3. gold flash over 30-50μ" Ni overall  
Recommended Finish
- T = 15. 15μ" selec. gold over 30-50μ" Ni overall
- T = 16. 30μ" selec. gold over 30-50μ" Ni overall

#### 3. (XX) Number of circuits

- Available in 2 through 40 circuits

Dimensions: (In mm.)

A = 2.54 x (XX\*-1)

B = 2.54 x (XX\*)+0.41

\* XX (Number of circuits)