

SINGLE ROW VERTICAL SOCKET



8435 SERIES. 2.54 mm. (0.100") pitch. Machined contact.



General Features

- Available in 2 through 40 circuits
- Mates with pin headers 2.54 mm. pitch 8412, 8394, 8398, and 8396 series
- Accept round pin 0.40 mm to 0.56 mm
- Round pin 0.50 mm in solder area with different lengths
- With different plating

Materials

- Insulator: PPS black + 30% GF UL 94 V-0
- Contact: Clip 4 fingers): Beryllium copper
- Sleeve: Brass
- Operating temperature. -40°C to +105°C
- RoHS compliant

Dimension Information

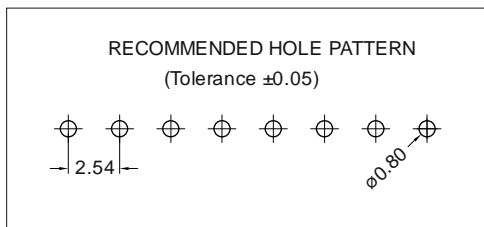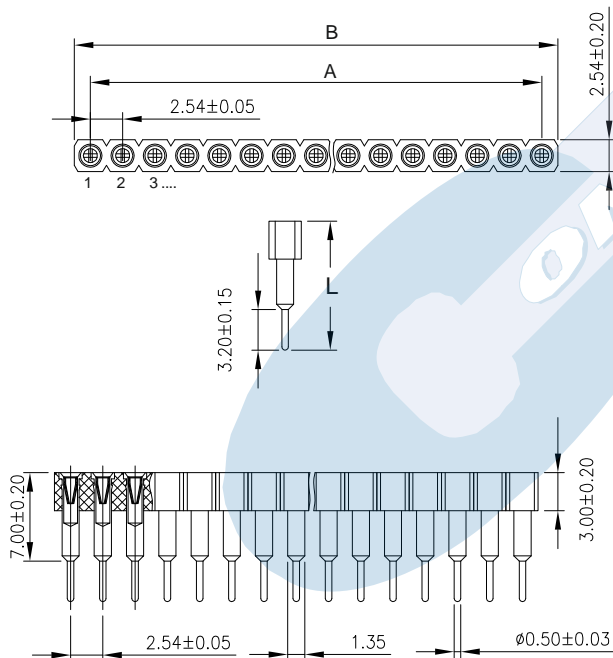

Dimensions: (In mm.)

$$A = 2.54 \times (XX^*-1)$$

$$B = 2.54 \times (XX^*) + 0.40$$

* XX (Number of circuits)

Electrical Features

- Voltage rating: < 250V
- Current rating: < 3A
- Contact resistance: < 10 mΩ
- Dielectric withstanding Voltage: 1000 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Insertion force per pin: < 0.20 Kgf (round pin 0.43 mm)
- Withdrawal force per pin: > 0.03 Kgf (round pin 0.43 mm)
- Durability: 500 Cycles



Ordering Information:

8435 - T- XX- C
 1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 13. Selec. gold flash over 30-50μ" Ni overall
Recommended Finish
- T = 15. 15μ" selec. gold over 30-50μ" Ni overall
- T = 16. 30μ" selec. gold over 30-50μ" Ni overall

3. (XX) Number of circuits

- Available in 2 through 40 circuits

4. (C) Pin length

- C=1. Dim. L = 10.20 mm.
- C=4. Dim. L = 12.20 mm.