


REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE

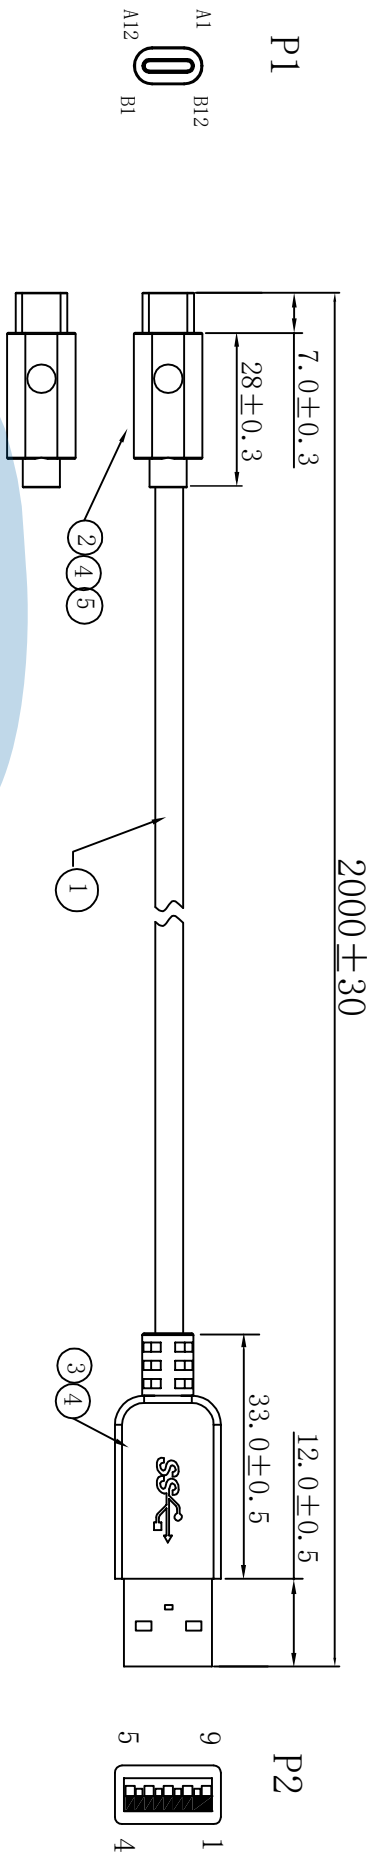

Part Number: 00-09-0495

Test requirements:  
 A. 100% points test can't dislocation.  
 B. 100% test conduction performance OK  
 (not short circuit, open circuit).

PIN ASSIGNMENT

USB Type-C Plug #1	USB Type-C Plug #2	COLOR (Ref)
PIN	Signal name	
A1, B1, A12, B12	GND	Black
A4, B4, A9, B9	VBUS	Red
A5	CC	
B5	Vconn	
A6	Dp1	Green
A7	Dn1	White
A2	SSTXp1	Yellow
A3	SSTXn1	Blue
B11	SSRXp1	Orange
B10	SSRXn1	Purple
SHELL	Shield	braid

No.	QTY	Description	P/N
⑧	IPC	Carton 460*300*250mm	F06-463025-001
⑦	IPC	PE Transparent Heat Sealing Bags :270*350*0.05mm	F05-273505-002
⑥	IPC	Band L=120mm	F01-120000-002
⑤	A/R	PE internal model rubber	P2-1500-001
④	A/R	50P PVC	P1-0445-001
③	IPC	USB3.1 A/M Welding line Three in one Blue	C331-0410-001
②	IPC	TYPE C PLUG G/F With PCB(FOR USB AM 3.1)	C311-0509-001
①	IPC	USB3.1标准线24#32#32TX镀锡铜+ (64编镀锡铜) OD:4.5mm黑色 不印字	X277-045145-641

UNITS	SCALE	REV.	SHEET	TITLE
mm	1:1	A0	1 OF 1	USB3.1 CM TO USB3.1 AM 02 Cable Assembly (M)
GENERAL TOLERANCE	DR.	DATE		
0. ±0.30	Nevin	15.05.22		
0.0 ±0.20				
0.00 ±0.15				
0. ±3°				
0. ±2°				



CHK.	MATL	FINISH
APPD.	SEE TABLE	SEE TABLE
DWG.NO.	A	PART NO.
		00-09-0495
		SIZE
		A4