

**WIRE MAP /568B**

568B	Pin out	568B
white-orange	1	1
orange	2	2
white-green	3	3
green	6	6
blue	4	4
white-blue	5	5
white brown	7	7
brown	8	8
shell	DRAIN	

Part Number configuration:

9600 - LLL\* - S\* - C\*

\* **LLL = Length in cm.**

LLL for more 10 mts.  
 LLL = **A15** (15 mts.)  
 LLL = **A25** (25 mts.)

\* **S = Shielded Options.**

**S= 0.** Without shielding  
**S= 1.** With shielding  
**S= 2.** Cross over with shielding  
**S= 3.** Cross over without shielding

\* **C = Colour.**


**C= A.** Blue  
**C= R.** Red  
**C= G.** Grey  
**C= Y.** Yellow  
**C= V.** Green

Material list	
1;	FTP Cat5E Cable, 26AWG Copper 7*0.15mm, PVC jacker, cable OD 5.2mm+/-0.2mm
2;	RJ45 8P8C Plug, gold plated pins, shielded , 2pcs
3;	Moulded Boot, Mould No 58#
4;	recyclable polybag, heat seal in bottom, 1pc
5;	sticker on polybag 1pc, black ink on white ground,

**Features**

1;	RoHS & REACH compliant
2;	Specification marks follow indication
3;	100% function test: open,short,revers,crossing, split pairs miss wire, and continuity
4;	only recyclable plastic bag used to pack this cable
5;	pass Channel test by Fluke tester
6;	568B wire map
7;	print on cable

E213738 CM (UL) C(UL) 4PRX26AWG FTP CAT5e PATCH CABLE ISO/IEC 11801 AND ANSI/TIA-568-C.2 ROHS COMPLIANT

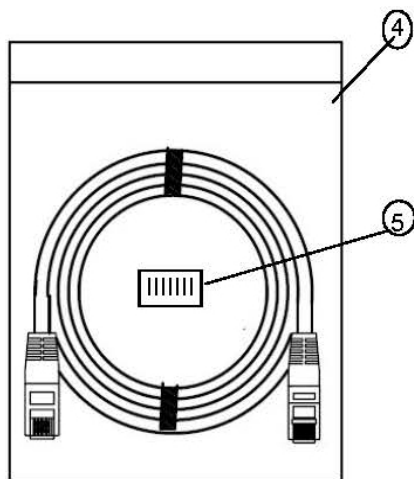

part No.			
product			
Draw by	Morgan		
Checked by	Peter		
Approved by	Bill	Date	02/13/2016