
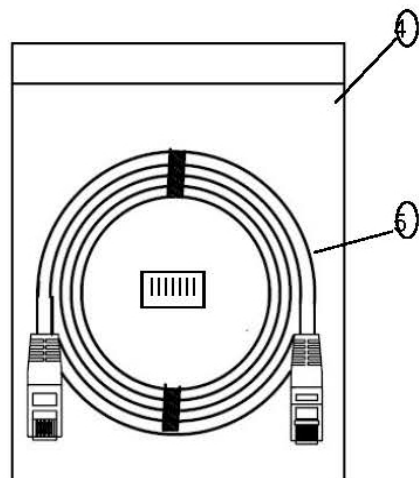


WIRE MAP /568B

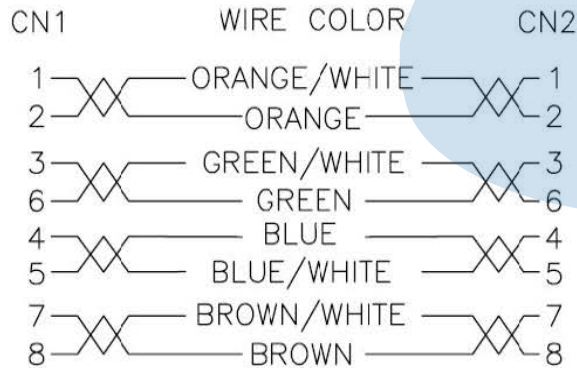

Part Number configuration:

9601 - LLL* - S* - C*

* **LLL = Length in cm.**

LLL for more 10 mts.
 LLL = **A15** (15 mts.)
 LLL = **A25** (25 mts.)

* **S = Shielded Options.**

S= 0. Without shielding
S= 1. With shielding
S= 2. Cross over with shielding
S= 3. Cross over without shielding

* **C = Colour.**

C= A. Blue
C= R. Red
C= G. Grey
C= Y. Yellow
C= V. Green

Features

1;	RoHS & REACH compliant
2;	Specification marks follow indication
3;	100% function test: open,short,revers,crossing, split pairs miss wire, and continuity
4;	only recyclable plastic bag used to pack this cable
5;	pass Channel test by Fluke tester
6;	568B wire map
7;	print on cable
E213738 CM (UL) C(UL) 4PRX24AWG UTP CAT6A PATCH CABLE ISO/IEC 11801 AND ANSI/TIA-568-C.2 ROHS COMPLIANT	

Material list

1;	UTP Cat6A Cable, 24AWG Copper , PVC jacker, cable OD 5.7mm+/-0.2mm
2;	RJ45 8P8C Plug, gold plated pins, unshielded , 2pcs
3;	Moulded Boot, Mould No 58#
4;	recyclable polybag, heat seal in bottom, 1pc
5;	sticker on polybag 1pc, black ink on white ground,

part No.			
product			
Draw by	Morgan	9601 SERIES	
Checked by	Peter	CAT. 6A Cable	
Approved by	Bill	Date	02/13/2016