
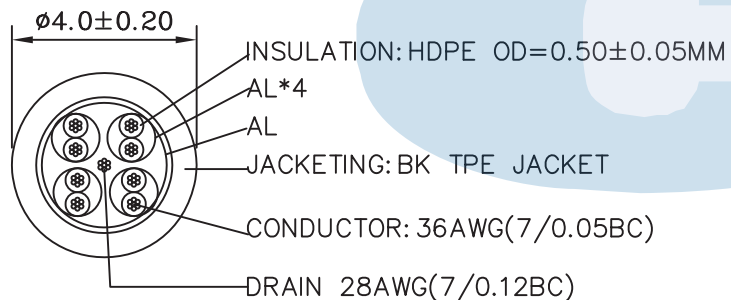


Length=*XXX ±10 mm.

(Dimension in Cm.)

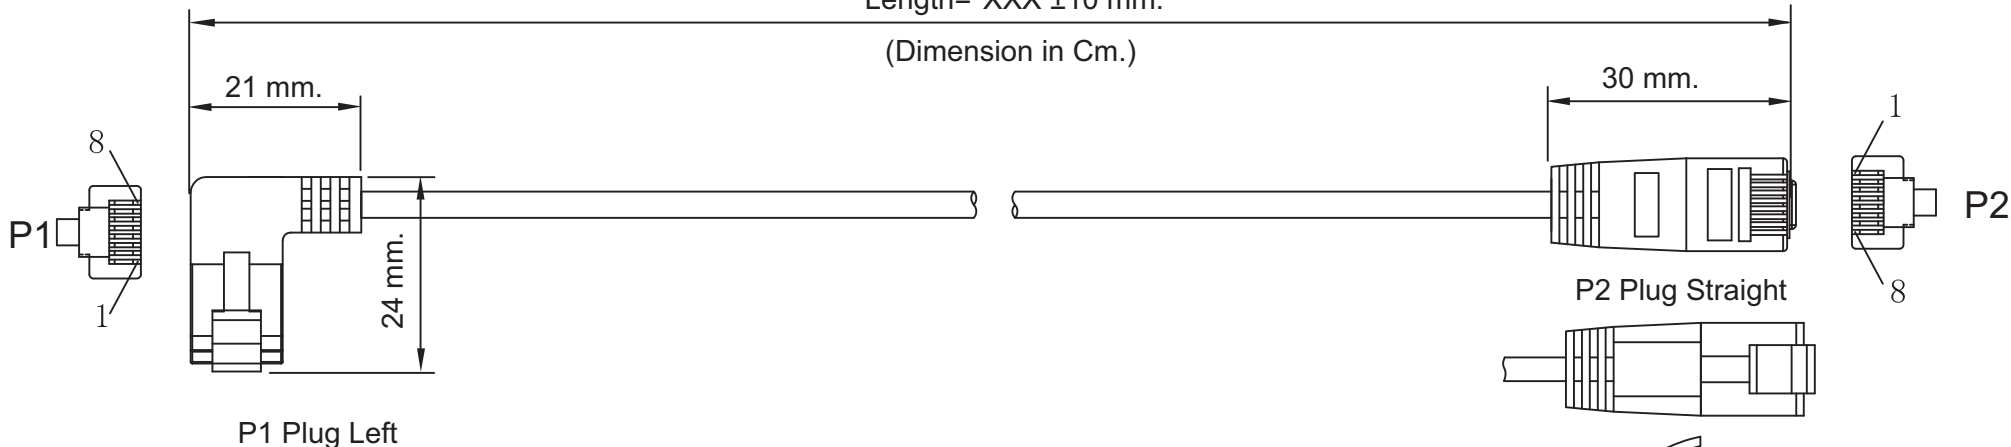


Part Number:

9607 - XXX - P - G

1 2 3 4

- 1. Serie
- 2. (XXX) Length in Cm,
- 3. (P) Cable Type
 - P = 0. UTP
 - P = 1. SSTP
- 4. (G) Colour
 - G = 1. Grey

WIRE CONNECTION

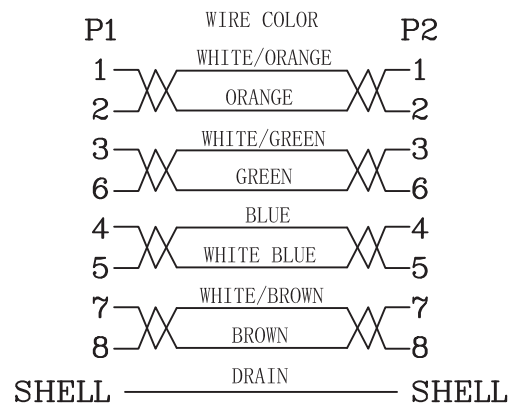

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. INSULATOR RESISTANCE: 5M OHMS MIN.
3. HI-POT: DC 300V 0.01sec.
4. ALL MATERIAL FIT ROHS STANDARD.

REMARK:

1. CABLE: CAT7 SSTP CABLE [1P*36AWG(7/0.05BC)+AL]*4+ Drain(7/0.12BC)+AL+BLACK TPE JACKET. OD: 4.0 ± 0.20MM.
2. CONN.: P1 P2 8P8C PLUG, SHORT BODY, PIN GOLD PLATED 1U".
3. ALL HOOD: MOLDED BLACK PVC.
4. PACKING: EACH CABLE IN POLY-BAG.

TOLERANCE		INCHES		M/M		ONEXCON			
. X	. 015	. 30	SCALE	NONE		REV	A	DWG NO.	
. XX	. 010	. 10	UNIT	MM					
. XXX	. 005	. 05	DRAWN BY	Peter		SHEET	1/2	DATE	17. 10. 30
CHECK BY			TITLE		8P8C PLUG/ 8P8C PLUG				
APPD BY			PART NO.		9607-XXX-P-G				