

# PLUG / HEADER PLUGGABLE SPRING CLAMP



## BC01344\*, BC01354\* SERIES. 3.50 mm. (0.098") pitch.

### General Features

- Available in 2 through 24 circuits
- Mates with 3.50 mm. pitch headers (Socket) pluggable terminal blocks
- Front or wire entry. Full polarised
- Meet UL and IEC standards

### Materials

- Insulator: PA66 UL 94 V-0
- Contact: Electrolytic cooper tin plated
- Wire cage: High-strength steel alloys zinc plated
- Operating temperature: -40°C to +105°C
- RoHS compliant


### Dimension Information

### Electrical Features

- Voltage rating: 300V UL; 130V IEC;
- Rated current: 10 A UL / 10 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 1300V UL / 2500 V IEC
- Insulation resistance: >500 MΩ


### Mechanical features

- Wire strip length: 5.00 mm.
- Conductor cross-section: AWG 28-14
- Durability: 25 cycles

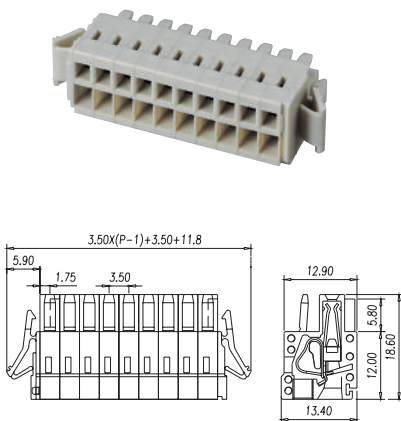


P/N: **BC013440-XX**

XX= N° CONTACTS

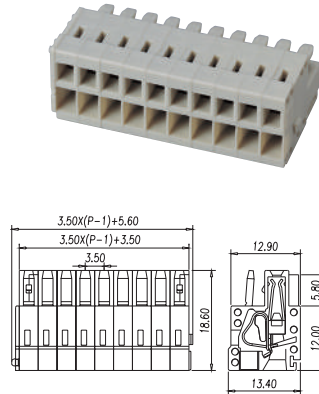


P/N: **BC013441-XX**

XX= N° CONTACTS

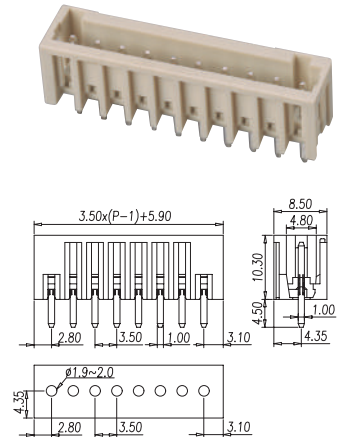

P/N: **BC013540-XX**

XX= N° CONTACTS

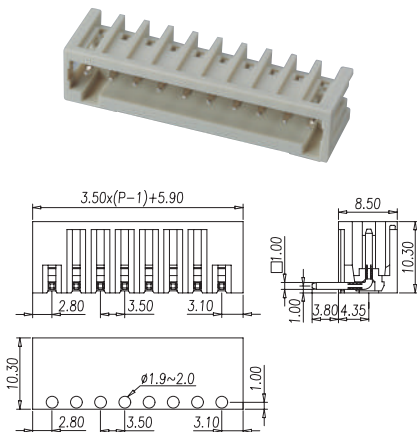

P/N: **BC013541-XX**

XX= N° CONTACTS