

PLUG/HEADERS FOR PLUGGABLE T. BLOCK



BC01474*, BC01484* SERIES. 7.62 mm. (0.300") pitch. PCB Type Spring Clamp.

General Features

- Available in 2 through 12 circuits
- Full polarised
- Top and side entry
- Meet UL and IEC standards

Materials

- Insulator: PA66 UL 94 V-0
- Contact: Electrolytic copper tin plated
- Operating temperature: -40°C to +105°C
- RoHS compliant


Dimension Information

Electrical Features

- Voltage rating: 300V UL; 1000V IEC;
- Rated current: 15 A UL / 24 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 1600V UL / 6000 V IEC
- Insulation resistance: >500 MΩ



Mechanical features

- Wire strip length: 8.00 to 9.00 mm.
- Conductor cross-section: AWG 28-12
- Durability: 25 cycles

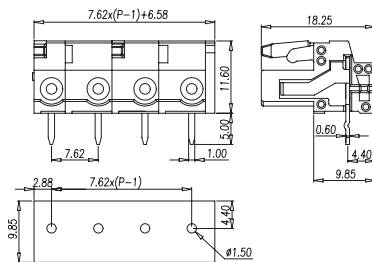



P/N: **BC014741-XX**

XX= N° CONTACTS

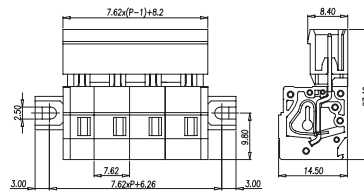



P/N: **BC014841-XX**

XX= N° CONTACTS



P/N: **BC014742-XX**

XX= N° CONTACTS



P/N: **BC014842-XX**

XX= N° CONTACTS