

# PLUG PLUGGABLE PID



## BC0159P\* SERIES. 3.50 mm. (0.138"). Push In design.

### General Features

- Available in 4 through 40 circuits
- Double level socket and easy pluggable style
- Mates with 3.50 mm. pitch plugs pluggable terminal blocks BC01591S series
- Full polarised. With/Without positive locking
- UL Approval

### Materials

- Insulator: PA66 UL 94 V-0.
- Contact: Cooper alloy tin plated
- Operating temperature: -40°C to +115°C
- RoHS compliant

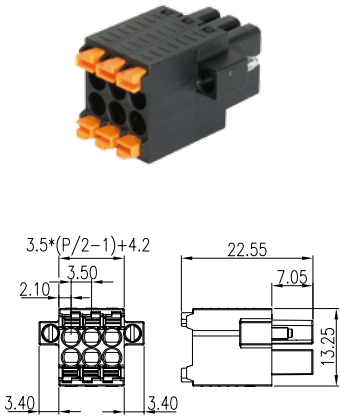
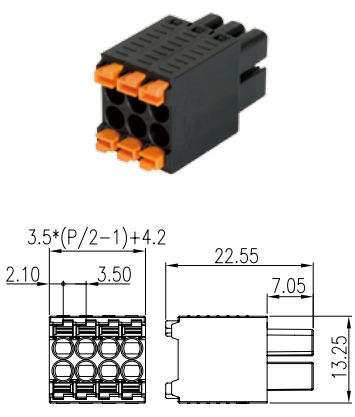
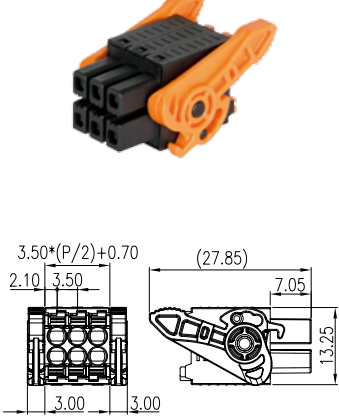
### Dimension Information


### Electrical Features

- Voltage rating: 150V UL / 250 V IEC
- Rated current: 8 A UL / 8 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 2500 V
- Insulation resistance: >500 MΩ

### Mechanical features

- Wire strip length: 9-10 mm.
- Conductor cross-section: AWG 24-16
- Durability: 25 cycles

 <p>P/N°: <b>BC0159-01XX</b> XX= N° CONTACTS</p>	 <p>P/N°: <b>BC0159-03XX</b> XX= N° CONTACTS</p>	 <p>P/N°: <b>BC0159-04XX</b> XX= N° CONTACTS</p>
--	---	--

 <p>P/N°: <b>BC0159K1L</b></p>		
---	--	--