

SOCKET PLUGGABLE SPRING



BC0225S-508* SERIES. 5.08 mm. (0.200").

General Features

- Available in 2 through 40 circuits
- Ultra-thin housing and easy pluggable style
- Mates with 5.08 mm. pitch plugs pluggable terminal blocks BC0225-508 series. Top or side entry
- Full polarised. Low profile (9.50 mm.)
- UL approval

Materials

- Insulator: High temperature plastic UL 94 V-0.
- Contact: cooper alloy tin plated
- Operating temperature: -40°C to +115°C
- RoHS compliant


Dimension Information

Electrical Features

- Voltage rating: 300V UL / 320V IEC
- Rated current: 8 A UL / 14 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 4000 V
- Insulation resistance: >500 MΩ

Mechanical features



- Durability: 25 cycles

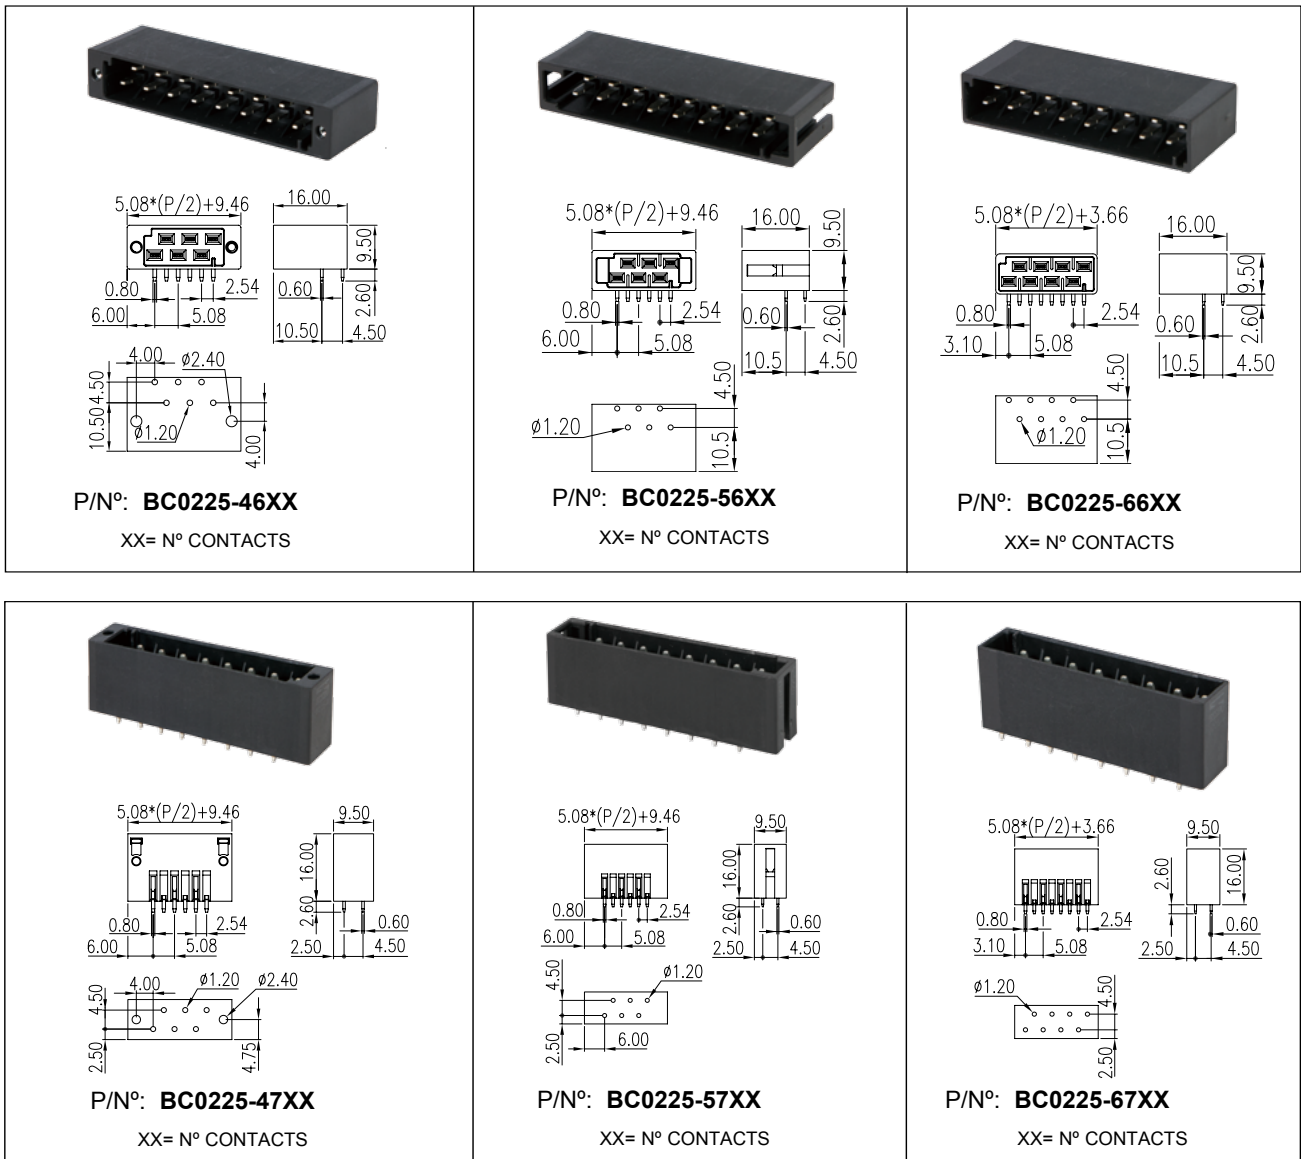

SOCKET PLUGGABLE SPRING





BC0225S-508* SERIES. 5.08 mm. (0.200").



P/N°: **BC0225-76XX**

XX= N° CONTACTS



P/N°: **BC0225-77XX**

XX= N° CONTACTS

