

PLUG PLUGGABLE LIGHT PIPE SPRING



BC02260* SERIES. 5.00 mm. (0.197"). With / Without LIGHT PIPE.

General Features

- Available in 2 through 16 circuits
- Ultra-thin housing and easy pluggable style
- Mates with 5.00 mm. pitch socket pluggable terminal blocks BC0226 with/without PIPE LIGHT
- Low profile 9.10 mm. with PIPE LIGHT
- Full polarised
- UL approvals

Materials

- Insulator: PA66 UL 94 V-0
- Contact: Cooper alloy tin plated
- Operating temperature: -40°C to +115°C
- RoHS compliant


Dimension Information

Electrical Features

- Voltage rating: 300V UL / 600V IEC
- Rated current: 10 A UL / 17.5 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 4000 V
- Insulation resistance: >500 MΩ


Mechanical features

- Wire strip length: 8-9 mm.
- Conductor cross-section: AWG 24-16
- Durability: 25 cycles

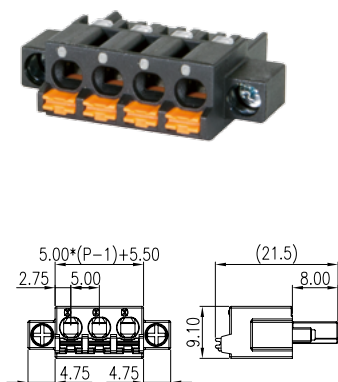


P/Nº: **BC0226-01XX**

XX= N° CONTACTS

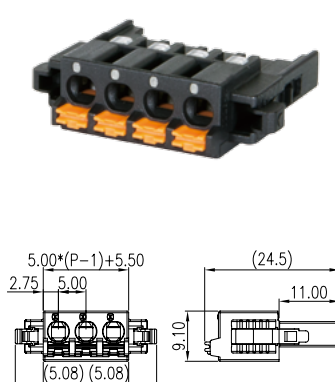


P/Nº: **BC0226-02XX**

XX= N° CONTACTS

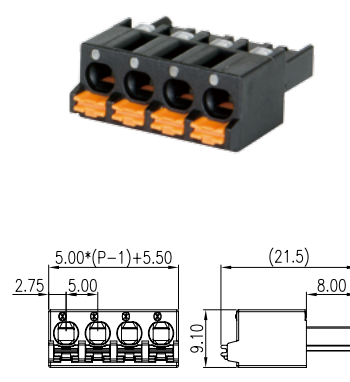


P/Nº: **BC0226-03XX**

XX= N° CONTACTS

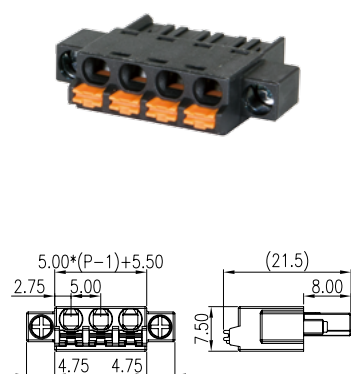


P/Nº: **BC0226-06XX**

XX= N° CONTACTS

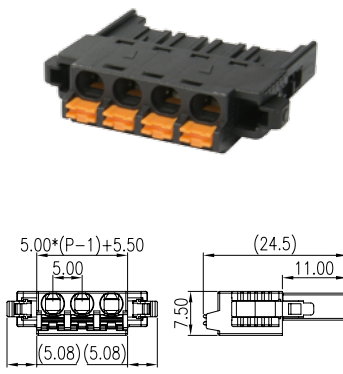

P/Nº: **BC0226-07XX**

XX= N° CONTACTS

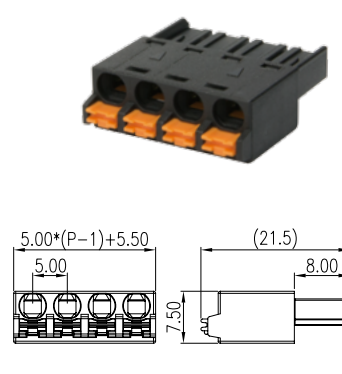

P/Nº: **BC0226-08XX**

XX= N° CONTACTS