

SOCKET PLUGGABLE SPRING



BC0226NLP* SERIES. 5.00 mm. (0.197").

General Features

- Available in 2 through 16 circuits
- Ultra-thin housing and easy pluggable style
- Mates with 5.00 mm. pitch plugs pluggable terminal blocks BC02260 without PIPE LIGHT
- Full polarised. Low profile 6.50 mm.
- Front or side wire entry
- UL approvals

Materials

- Insulator: PA66 UL 94 V-0
- Contact: Cooper alloy tin plated
- Operating temperature: -40°C to +115°C
- RoHS compliant


Dimension Information

Electrical Features

- Voltage rating: 300V UL / 630V IEC
- Rated current: 8 A UL / 15 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 4000 V
- Insulation resistance: >500 MΩ


Mechanical features

- Durability: 25 cycles

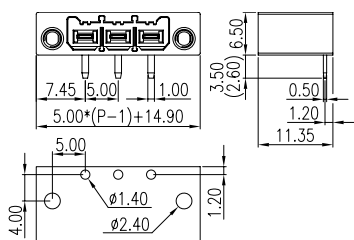


P/Nº: **BC0226-16XX**

XX= Nº CONTACTS




P/Nº: **BC0226-26XX**

XX= Nº CONTACTS




P/Nº: **BC0226-36XX**

XX= Nº CONTACTS




P/Nº: **BC0226-17XX**

XX= Nº CONTACTS



P/Nº: **BC0226-27XX**

XX= Nº CONTACTS



P/Nº: **BC0226-37XX**

XX= Nº CONTACTS