

HEADERS FOR PLUGGABLE TERMIN. BLOCK



BC3EHD* SERIES. 7.62 mm (0.300") PCB Type.

General Features

- Available in 2 through 14 circuits.
Series BC3EHD*M 2 through 12 circuits
- Mates with 7.62 mm. pluggable plugs terminal blocks
- Full polarised. Top and side entry types
- Meet IEC 61984 and UL 1059 requirements and are approved by UL and VDE

Materials

- Insulator: PA66 UL 94 V-0
- Contact: Electrolytic cooper tin plated
- Operating temperature: -40°C to +105°C
- RoHS compliant


Dimension Information

Electrical Features


- Voltage rating: 300V UL / 800V IEC
- Rated current: 15A UL / 18 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 1600V UL / 6000 V IEC
- Insulation resistance: >500 MΩ

Mechanical features


- Durability: 25 cycles

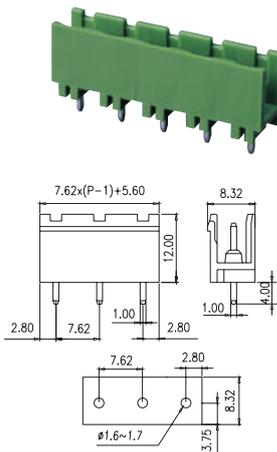


P/N: **BC3EHDV-XX-P**
XX= N° CONTACTS

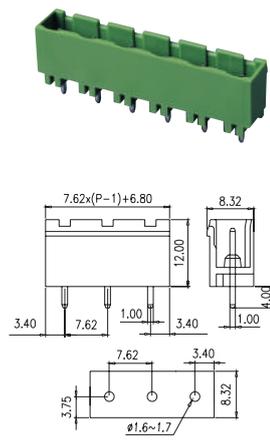


P/N: **BC3EHDVC-XX-P**
XX= N° CONTACTS

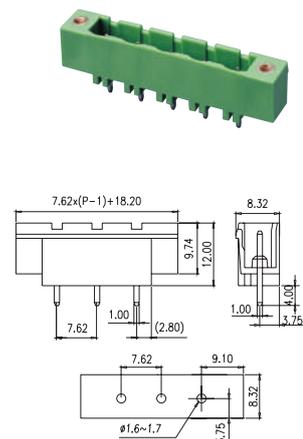


P/N: **BC3EHDVM-XX-P**
XX= N° CONTACTS

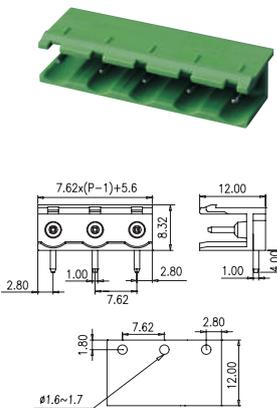

P/N: **BC3EHDR-XX-P**
XX= N° CONTACTS

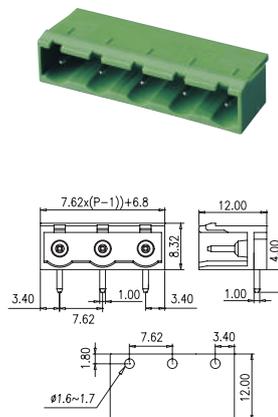

P/N: **BC3EHDRC-XX-P**
XX= N° CONTACTS

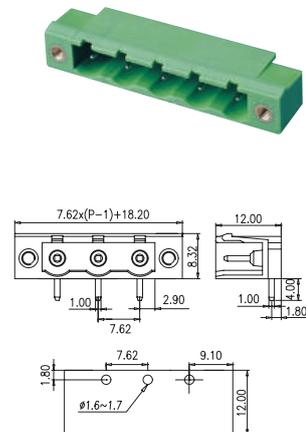

P/N: **BC3EHDRM-XX-P**
XX= N° CONTACTS