

PLUG FOR PLUGGABLE TERMINAL BLOCK



BC5ESD*, BC5ESV*, BC5ESR*, BC0257 SERIES. 5.00 mm (0.197") pitch.

General Features

- Available in 2 through 24 circuits (Screwless Type)
- Mates with 5.00 mm. pitch pluggable plugs term. blocks
- Top and side entry type. Full polarised
- Meet IEC 60998 and UL 1059 requirements and are approved by UL and VDE

Materials

- Insulator: PA66 UL 94 V-0
- Contact: Electrolytic cooper tin plated
- Wire cage: High-strength steel alloys zinc plated
- Operating temperature: -40°C to +105°C
- RoHS compliant

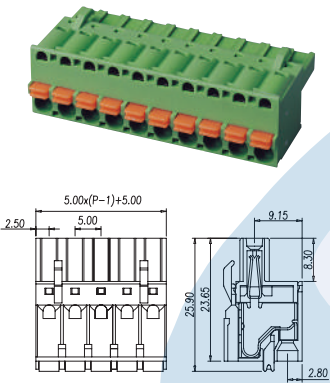
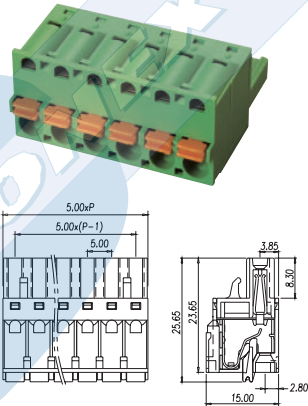
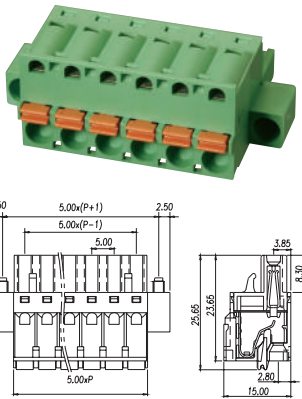
Dimension Information

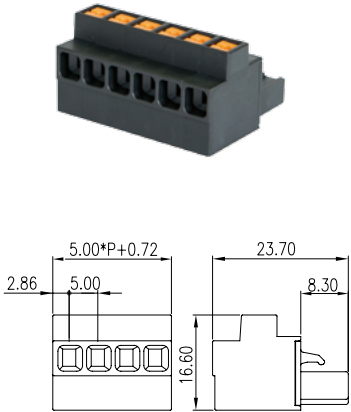
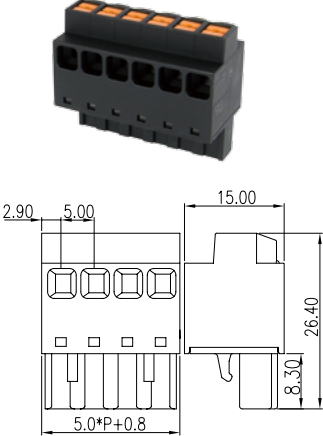
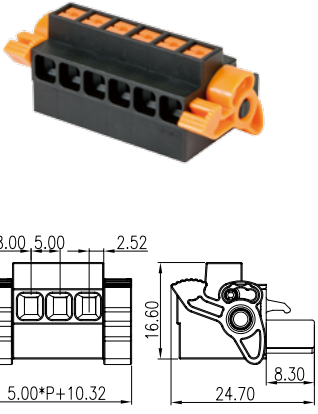
Electrical Features

- Voltage rating: 300V UL / 600V IEC
- Rated current: 10 A UL / 16 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 1600V UL / 4000V IEC
- Insulation resistance: >500 MΩ

Mechanical features

- Wire strip length: 10.00 to 12.00mm.
- Conductor cross-section: AWG 26-12


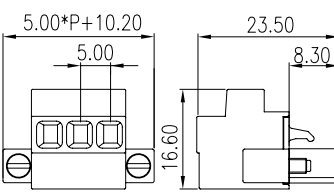

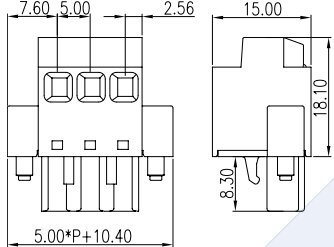

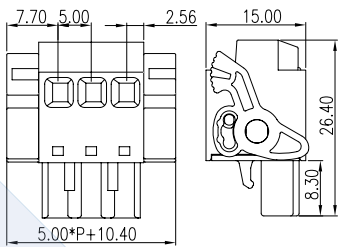
 <p>*Rated current 10A UL / 12 A IEC / 250 V IEC</p> <p>P/N: BC5ESDS-XX-P XX= N° CONTACTS</p>	 <p>*Rated current 10A UL / 12 A IEC / 250 V IEC</p> <p>P/N: BC5ESDSR-XX-P XX= N° CONTACTS</p>	 <p>*Rated curr. 10A UL / 12 A IEC / 250 V IEC</p> <p>P/N: BC5ESDSRM-XX-P XX= N° CONTACTS</p>
--	--	--


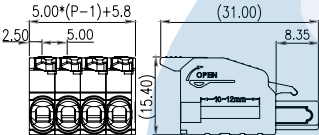

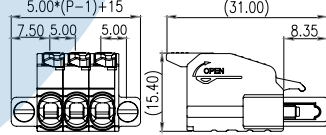

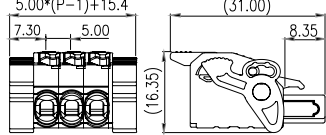
 <p>P/N: BC5ESV-XX-P XX= N° CONTACTS</p>	 <p>P/N: BC5ESR-XX-P XX= N° CONTACTS</p>	 <p>P/N: BC5ESVK-XX-P XX= N° CONTACTS</p>
--	---	---

PLUG FOR PLUGGABLE TERMINAL BLOCK



BC5ESD*, BC5EHDK*, BCESDK* SERIES. 5.00 mm (0.197") pitch. For wire.

  <p>P/N: BC5ESVM-XX-P XX= N° CONTACTS</p>	  <p>P/N: BC5ESRM-XX-P XX= N° CONTACTS</p>	  <p>P/N: BC5ESRK-XX-P XX= N° CONTACTS</p>
---	--	---

  <p>P/N: BC0257-11XX XX= N° CONTACTS</p>	  <p>P/N: BC0257-12XX XX= N° CONTACTS</p>	  <p>P/N: BC0257-14XX XX= N° CONTACTS</p>
---	--	---

Empty cell	Empty cell	Empty cell
------------	------------	------------