

PLUG FOR PLUGGABLE TERM. BLOCK SCREW



BCEC* SERIES. 3.81 mm (0.150") pitch. For wire Screw Type.

General Features

- Available in 2 through 24 circuits
- Mates with 3.81 mm. pitch headers (sockets) pluggable terminal blocks
- Full polarised. Front or side wire entry
- Meet IEC 61984 and UL 1059 requirements and are approved by UL and VDE

Materials

- Insulator: PA66 UL 94 V-0
- Contact: Electrolytic cooper tin plated
- Wire cage: High-strength steel alloys zinc plated
- Screw: High strength steel alloys M2 zinc plated
- Operating temperature: -40°C to +105°C
- RoHS compliant


Electrical Features

- Voltage rating: 300V UL / 320V IEC
- Rated current: 8 A UL / 14 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 1600V UL / 2500V IEC
- Insulation resistance: >500 MΩ

Mechanical features

- Wire strip length: 6.00 to 7.00 mm.
- Conductor cross-section: AWG 28-14
- Torque (N-m): 0.19
- Durability: 25 cycles


Dimension Information

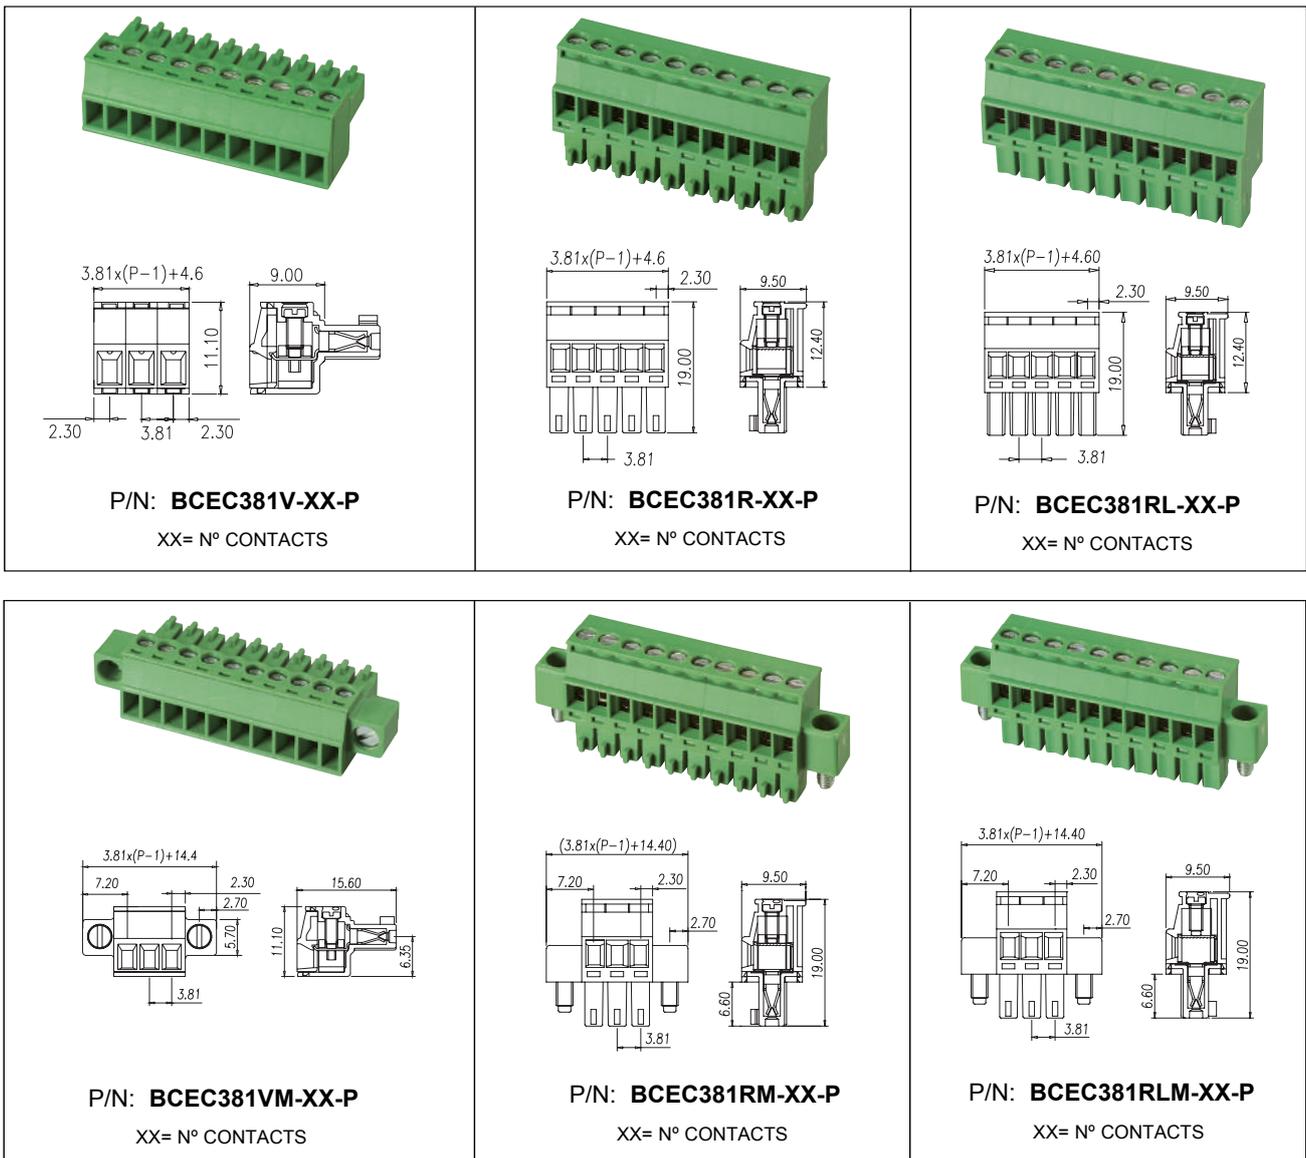


PLUG FOR PLUGGABLE TERM. BLOCK SCREW




BCEC* SERIES. 3.81 mm (0.150") pitch. For wire Screw Type.

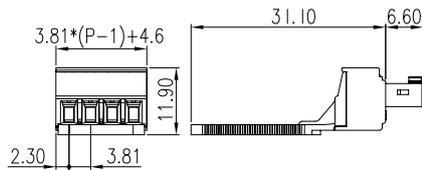

P/N: **BCEC381L-XX-P**
XX= N° CONTACTS

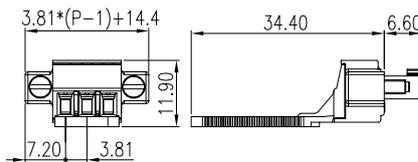

P/N: **BCEC381LM-XX-P**
XX= N° CONTACTS

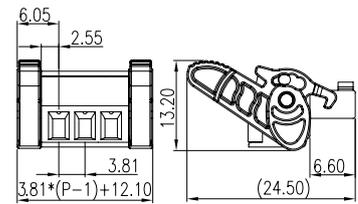

P/N: **BCECSH381VK-XX-P**
XX= N° CONTACTS