

PLUG / HEADERS PLUGGABLE SPRING



BCECH508* SERIES. 5.08 mm (0.200") pitch. PCB Type.

General Features

- Available in 2 through 24 circuits
- Mates with 5.08 mm. pitch pluggable terminal blocks BCEC508 and BCESC508 series
- Top and side wire entry. Full polarised
- Meet IEC 60947-7-4 and UL 1059 requirements and are approved by UL and VDE

Materials

- Insulator: PA66 UL 94 V-0
- Contact: Electrolytic cooper tin plated
- Operating temperature: -40°C to +105°C
- Wire cage: High-strength steel alloys zinc plated
- RoHS compliant


Electrical Features

- Voltage rating: 300V UL / 600V IEC
- Rated current: 8 A UL / 14 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 1600 V UL / 4000 V IEC
- Insulation resistance: >500 MΩ

Mechanical features


- Durability: 25 cycles

Dimension Information

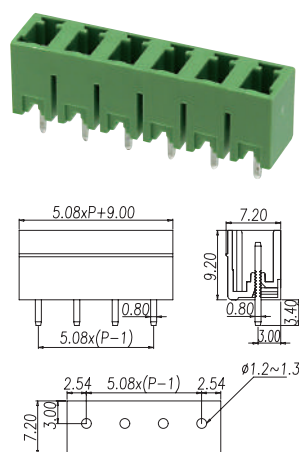


P/N: **BCECH508V-XX-P**

XX= N° CONTACTS

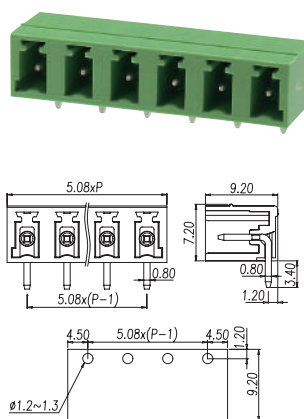


P/N: **BCECH508R-XX-P**

XX= N° CONTACTS

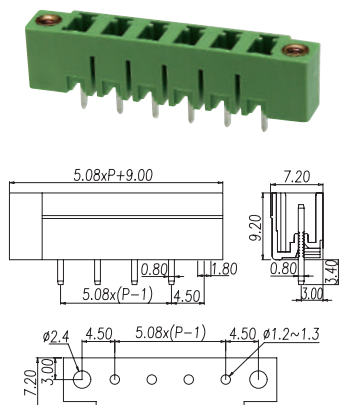

P/N: **BCECH508VM-XX-P**

XX= N° CONTACTS

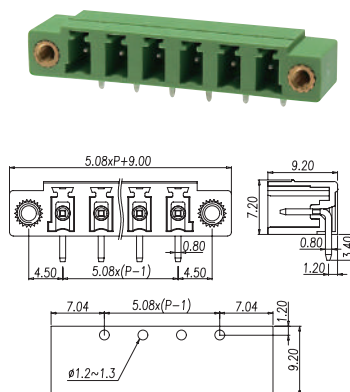

P/N: **BCECH508RM-XX-P**

XX= N° CONTACTS