

PLUG / HEADER FOR PLUGGABLE TER. BLOCK



BCED130*, BCEDH130* SERIES. 5.00 mm. (0.197"). Round Pin Pluggable.

General Features

- Available in 2 through 24 circuits
- Full polarised
- Top and side entry types
- Meet IEC 60984 and UL 1059 requirements and are approved by UL and VDE

Materials

- Insulator: PA66 UL 94 V-0
- Contact: Electrolytic copper tin plated
- Screw: High-strength steel alloys M 2.5 zinc plated
- Operating temperature: -40°C to +105°C
- RoHS compliant


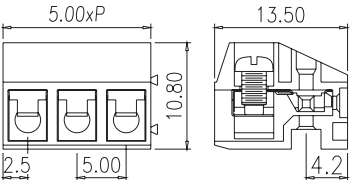




Dimension Information







Electrical Features

- Voltage rating: 300V UL / 250V IEC
- Rated current: 7 A UL / 10 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 1600 V UL / 4000 V IEC
- Insulation resistance: >500 MΩ

Mechanical features

- Wire strip length: 5.00 to 6.00 mm.
- Conductor cross-section: AWG 22-14
- Torque (N-m): 0.31
- Durability: 25 cycles

  <p>P/N: BCED130F-XX-P XX= N° CONTACTS</p>	  <p>P/N: BCEDH130F-XX-P1 XX= N° CONTACTS</p>	  <p>P/N: BCEDH130F-XX-PTHT XX= N° CONTACTS</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

  <p>* 12 A UL / 12 A IEC P/N: BCED130A-XX-P XX= N° CONTACTS</p>	  <p>* 12 A UL / 12 A IEC P/N: BCED130T-XX-P XX= N° CONTACTS</p>	  <p>* 12 A UL / 12 A IEC P/N: BCED130W-XX-P XX= N° CONTACTS</p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------