PCB T. BLOCK HIGH CURRENT (24-30-32 A)



BCESK508*, BCESK7*, BCEKB*, BCEK950* SERIES. 5.08 to 9.50 mm.

General Features

- Available in 2 through 24 circuits
- High reliability structure of wires connections and Professional applications
- Side and top wires entry. Single and bi-level structure
- Meet IEC 60998 and UL 1059 requirements and are approved by UL and VDE

Materials

- Insulator: PA66 UL 94 V-0
- Contact: Electrolytic copper tin plated
- Screw: High-strength steel alloys M 3 zinc plated
 Wire cage: High strength steel alloys Zinc plated
- Operating temperature: -40°C to +105°C
- RoHS compliant


Dimension Information


Electrical Features

- Voltage rating: 300 V UL / 450 V IEC
- Rated current: 30 A UL / 32 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 2200 V UL / 6000 V IEC
- Insulation resistance: >500 MΩ

Mechanical Features

- Wire strip length: 10.00 -11.00 mm. (6-7 mm. BCEK950 Seri.)
- Conductor cross-section: AWG 26-10 (AWG 24-10 BCE762V and BCESK762V Series)
- Torque (N-m): 0.80;1.37 BCESKB762V and BCESK762V series
- Durability: 25 cycles

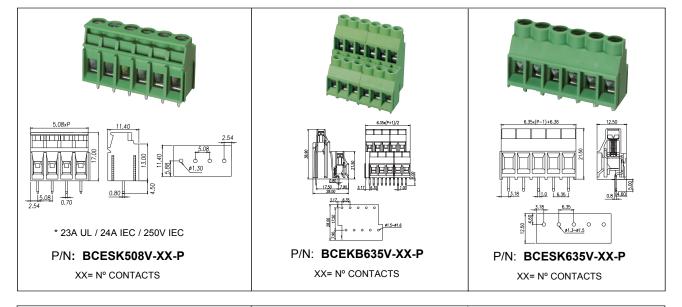

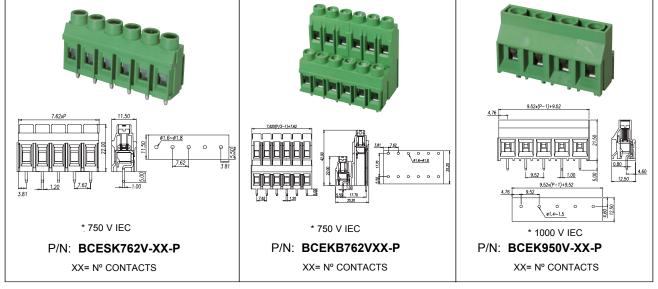

E-XX FULL LINE CATALOGUE