

# SCREWLESS PCB T. BLOCK SPRING CLAMP



## BCWKA762\*, BCWKV762\*, BCWKR762\* SERIES. 7.62mm. pitch. PCB Type.

### General Features

- Available in 2 through 12 circuits
- Easy to insert anti-vibration and save time to entry wires
- High reliability structure of wires connections and professional applications
- Top, side and 45° wires entry.
- Meet IEC 60947-7-4 and UL 1059 requirements and are approved by UL and VDE
- End cover: BCWKA500AC (45° Entry)  
BCWKV500AC(Top Entry) - BCWKR500AC (Side Entry)

### Materials

- Insulator: PA66 UL 94 V-0. RoHS compliant
- Contact: Electrolytic cooper tin plated
- Spring: High-strength steel alloys zinc plated
- Operating temperature: -40°C to +105°C

### Electrical Features

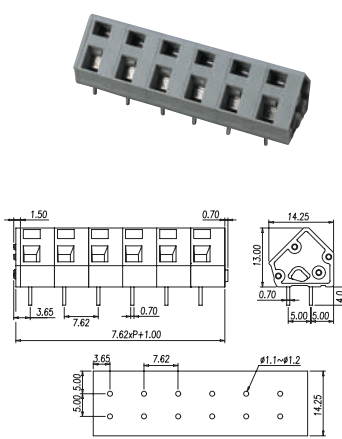
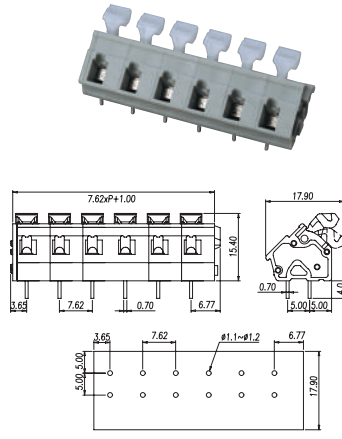
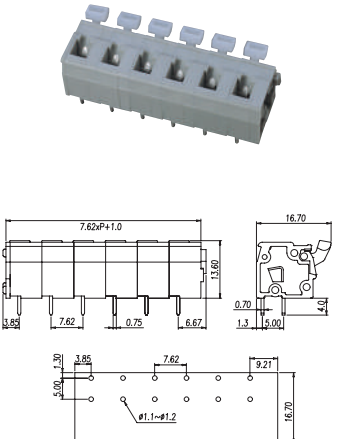
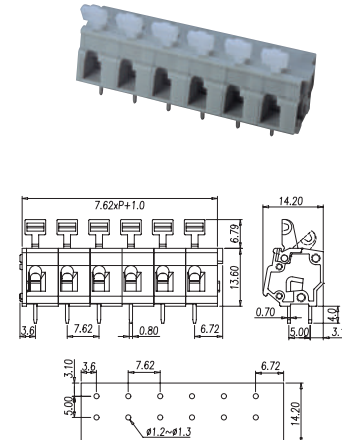
- Voltage rating: 300V UL / 450 V IEC
- Rated current: 15 A UL / 24 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 1600V UL / 6000 IEC
- Insulation resistance: >500 MΩ

### Mechanical features

- Conductor cross-section: AWG 28-12
- Wire strip length: 5.00 to 6.00 mm. Durability: 25 cycles

### Colour Options

- With differents colour options. Standard colour **GREY**
- For no standard colour add to Part Number:  
**GN** (Green), **RD** (Red), **BL** (Blue), **BK** (Black), **OR** (Orange)

 <p>P/N: <b>BCWKA762-XX-P</b> XX= N° CONTACTS</p>	 <p>P/N: <b>BCWKA762A-XX-P</b> XX= N° CONTACTS</p>	 <p>P/N: <b>BCWKV762A-XX-P</b> XX= N° CONTACTS</p>
 <p>P/N: <b>BCWKR762A-XX-P</b> XX= N° CONTACTS</p>		